



# EMC TEST REPORT For CE

Test Report No. : KES-E1-16T0608-R1  
Date of Issue : Sep, 27, 2017  
Product name : NETWORK CAMERA  
Model/Type No. : XNB-8000P  
Variant Model : -  
Applicant : Hanwha Techwin Co., Ltd.  
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,  
Gyeongsangnam-do, Korea  
Manufacturer : Hanwha Techwin(Tianjin) Co., Ltd.  
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial  
Park, TEDA, Tianjin, 300385, People's Republic of China  
Date of Receipt : Nov, 23, 2016  
Test date : Nov, 28, 2016 – Nov. 30, 2016  
Test Results :  **In Compliance**  **Not in Compliance**

Tested by

Young Suk, Song  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

## REPORT REVISION HISTORY

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-16T0608-R1  
Page (2) of (98)

---

Date	Test Report No.	Revision History
Dec. 05, 2016	KES-E1-16T0608	Issued
Sep. 27, 2017	KES-E1-16T0608-R1	Standard Revision

---

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

---

## TABLE OF CONTENTS

1.0	General Product Description .....	4
1.1	Test Voltage & Frequency .....	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications .....	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments .....	7
1.6	External I/O Cabling .....	8
1.7	E.U.T Operating Mode(s) .....	9
1.8	Configuration.....	10
1.9	Calibration Details of Equipment Used for Measurement .....	12
1.10	Test Facility .....	12
1.11	Laboratory Accreditations and Listings .....	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports .....	15
2.2	Conducted Emissions at Telecommunication Ports .....	16
2.3	Radiated Electric Field Emissions(Below 1 GHz) .....	17
2.4	Radiated Electric Field Emissions(Above 1 GHz).....	18
2.5	Harmonic Current Emissions .....	19
2.6	Voltage Fluctuations and Flicker .....	20
3.0	Criteria for compliance.....	21
3.1	Electrostatic Discharge.....	23
3.2	Radiated Electric Field Immunity .....	29
3.3	Electrical Fast Transients/Bursts .....	32
3.4	Surge Transients .....	35
3.5	Conducted Disturbance .....	39
3.6	Voltage Dips and Short Interruptions .....	43
APPENDIX A – TEST DATA.....		45
	Conducted Emissions at Mains Power Ports.....	45
	Conducted Emissions at Telecommunication Ports .....	47
	Radiated Electric Field Emissions(Below 1 GHz) .....	53
	Radiated Electric Field Emissions(Above 1 GHz).....	55
	Harmonic Current Emissions and Voltage Fluctuations and Flicker .....	67
	Test Setup Photos and Configuration .....	70
	Conducted Voltage Emissions .....	70
	Conducted Telecommunication Emissions .....	71
	Radiated Electric Field Emissions(Below 1 GHz) .....	74
	Radiated Electric Field Emissions(Above 1 GHz).....	77
	Harmonic Current Emissions and Voltage Fluctuations and Flicker .....	80
	Electrostatic Discharge .....	80
	Radiated Electric Field Immunity .....	81
	Electrical Fast Transients/Bursts.....	83
	Surge Transients.....	86
	Conducted Disturbance .....	89
	Voltage Dips and Short Interruptions.....	92
	EUT External Photographs.....	93
	EUT Internal Photographs .....	94

## 1.0 General Product Description

### Main Specifications of E.U.T are:

<b>Video</b>	
Imaging Device	1/1.8" 6M CMOS
Total Pixels	3096(H) x 2094(V)
Effective Pixels	2616(H) x 1976(V)
Scanning System	Progressive Scan
Min. Illumination	Color : 0.03 lux (TBD) B/W : 0.003Lux(TBD)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1920 x 1080(TBD), for installation
<b>Lens</b>	
Focal Length (Zoom Ratio)	
Max. Aperture Ratio	
Angular Field of View	
Min. Object Distance	
Focus Control	Simple focus / Manual, Remote control via network, Butto control (Manual, Simple focus)
Lens Type	Manual / DC Auto Iris, P-iris
Mount Type	C/CS
<b>Pan / Tilt / Rotate</b>	
Pan / Tilt / Rotate range	
<b>Operational</b>	
IR LED	
Viewable Length	
Camera Title	Off / On (Displayed up to 55 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 6), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR(Seamless transition TBD)
Wide Dynamic Range	120dB(TBD)
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto(input from fog&Dust detection) / Manual / Off
Motion Detection	Yes(8ea, 4point Polygonal zones)
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic ※ Zoom ratio option for mask mode (TBD)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec →TBD)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
 www.kes.co.kr

Test report No.:  
 KES-E1-16T0608-R1  
 Page (5) of (98)

Digital PTZ	24X, 'Digital PTZ(Preset, Group)
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Intelligent Video & Audio A	Tampering, Loitering, Directional Detection, Defocus Detection, Fog&Dust Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Motion Detection, Digital Auto Tracking, Sound Classification
Alarm I/O	Input 1ea / Output 1ea
Remote Control Interface	-
RS-485 Protocol	-
Alarm Triggers	Alarm Input, Motion Detection, Intelligent Video Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms
Fan / Heater	-
Pixel Counter	Support
<b>Network</b>	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Forma	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	5M mode : 2592 x 1944, 2592 x 1464, 1920 x 1080, 1600 x 1200, 1280 x 1024, 1280 x 960 1280 x 720, 1024 x 768, 800 x 600, 720 x 576, 720 x 480, 640 x 480, 320 x 240 2M mode : 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x450, 720x576 640x480, 640x360, 320x240, 320x180
Max. Framerate	5M mode : H.265/H.264 : Max. 30fps at all resolutions Motion JPEG : Max. 30fps 2M mode : H.265/H.264 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR, with WiseStream MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Forma	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-dierctional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
 www.kes.co.kr

Test report No.:  
 KES-E1-16T0608-R1  
 Page (6) of (98)

Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP) - Streaming Encryption 기능구현
Streaming Method	Streaming Method
Max. User Access	20 users at Unicast Mode(TBD)
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - (TBD) Redundant recording - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Danish, Portuguese, Czech, Polish, Turkish, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Norsk, Finnish
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.8. 10.9. 10.10. 10.11 <b>Non-plugin Webviewer</b> Supported Browser: Google Chrome 47, MS Edge 20 Support Codec : Video : H.264, MJPEG (MAX 1M 15FPS) Audio : G.711 <b>Plug-in Webviewer</b> Supported Browser : MS Explore 11 , Mozilla Firefox 43 , Apple Safari 9 * Mac OS X only
Central Management Soft	SmartViewer, SSM
<b>Environmental</b>	
Operating Temperature / Humidity	-10°C ~ +55°C (-14°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	-
Vandal Resistance	-
<b>Electrical</b>	
Input Voltage / Current	24VAC ± 10%, 12VDC ± 10%, PoE(IEEE802.3af)
Power Consumption	TBD
<b>Mechanical</b>	
Color / Material	Black, Ivory / Plastic
Dimension (WxHxD)	TBD
Weight	TBD
<b>스펙시트 미표기 요구사항</b>	
Cable Connection	Plug-in
SD카드	듀얼슬롯

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage       220 Vac    230 Vac    24 Vac    12 Vdc    PoE  
Frequency     50 Hz     60 Hz            Hz

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNB-8000P	-	Hanwha Techwin(Tianjin) Co., Ltd.	E.U.T

## 1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE ADAPTOR	ANY4805C-LT1	10H300002	ANY ELECTRONICS CO., LTD	-
Notebook	X56K	HN11N5151FJ0045 W	HANSUNG COMPUTER	-
Notebook ADAPTOR	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
SPEAKER	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
Cellphone	LG-F700	-	LG	-
Alarm	-	-	-	-
Micro SD CARD	-	-	-	4GB
Lens	SLA-M2890DN	-	SAMSUNG	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## 1.6 External I/O Cabling

- AC, DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	Audio In	Cellphone	Audio In	1.0	U
	Audio OUT	SPEAKER	Audio OUT	1.7	U
	Micro SD	Micro SD Card	Micro SD	-	-
	Iris	Lens	Iris	-	-
	2Pin	Alarm	2Pin	3.0	U

- POE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	POE ADAPTOR	RJ-45	3.0	U
	Audio In	cellphone	Audio In	1.0	U
	Audio OUT	SPEAKER	Audio OUT	1.7	U
	Micro SD	Micro SD Card	Micro SD	-	-
	Iris	Lens	Iris	-	-
	2Pin	Alarm	2Pin	3.0	U
POE ADAPTOR	RJ-45	Notebook	RJ-45	3.5	U

\* Unshielded=U, Shielded=S





**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-16T0608-R1  
Page (9) of (98)

## 1.7 E.U.T Operating Mode(s)

Test mode	Normal operating
AC, DC, POE	E.U.T Monitoring, 1 kHz, Ping Test


E.U.T Test operating S/W		
Name	Version	Manufacture Company
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


## 1.8 Configuration

■ AC Main  
 □ DC Main

- AC Mode

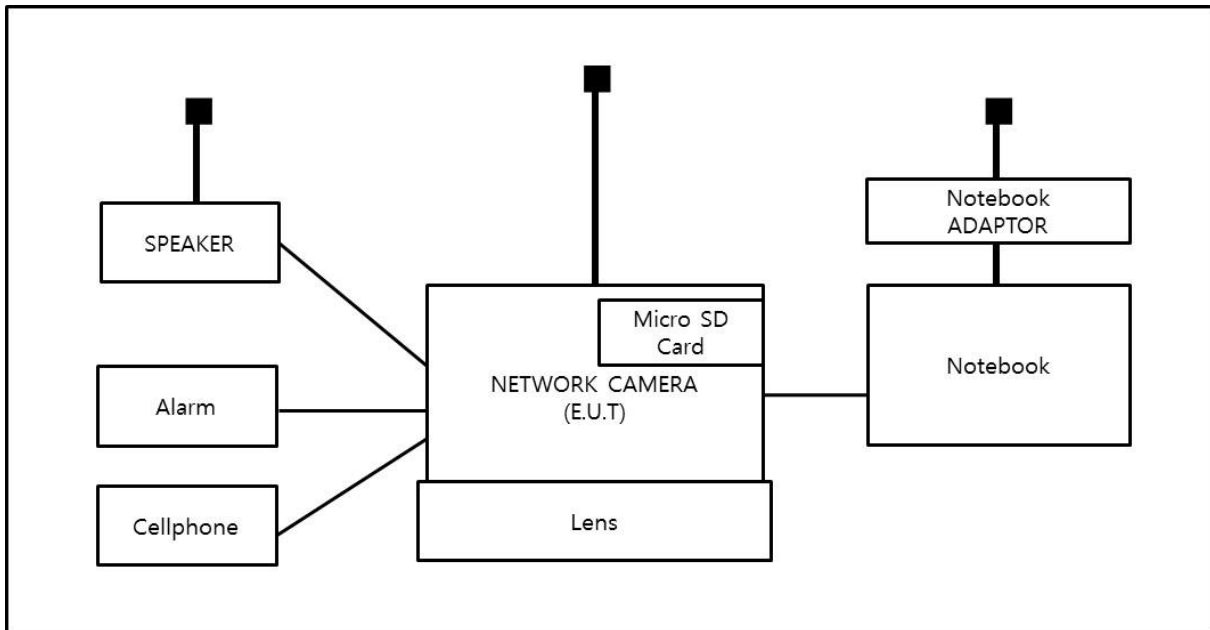


- DC Mode

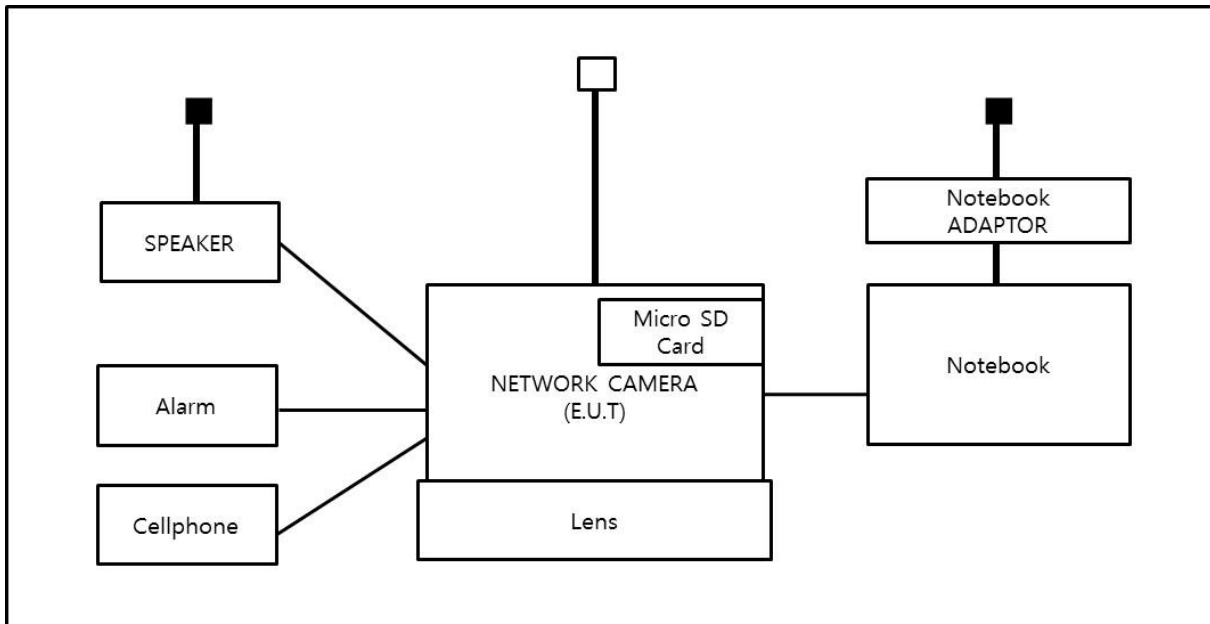

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

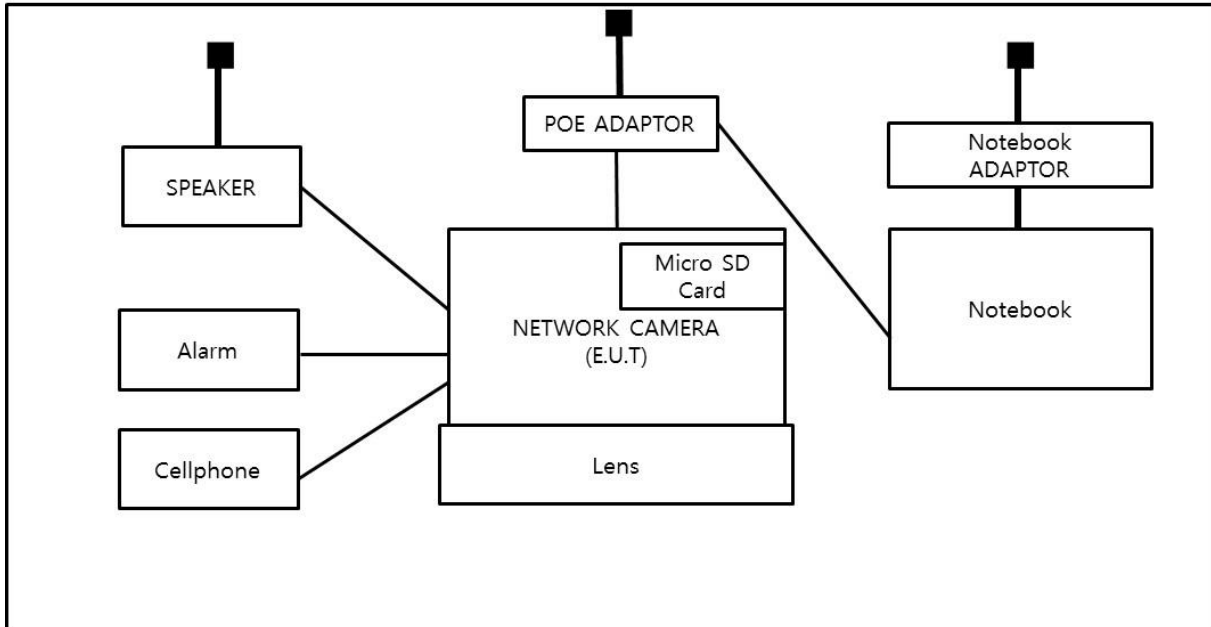

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.







## 1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

## 1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

**EMC – Directive 2014/30/EU**

EN 61000-6-3:2011

EN 61000-6-1:2007

EN 61000-6-4:2007 +A1:2011

EN 61000-6-2:2005

EN 55011:2007 +A1:2010

Group 1  
 Class A

Group 2  
 Class B

EN 55014-1:2006 +A2:2011

EN 55014-2:1997 +A2:2008

EN 55015:2013

EN 61547:2009

EN 55032:2012

Class A

Class B

EN 55024:2010 +A1:2015

EN 50130-4:2011

EN 61000-3-2:2014

EN 61000-3-3:2013

EN 61326-1:2013



- 
- |   |                                  |                                  |
|---|----------------------------------|----------------------------------|
| <input type="checkbox"/> <b>VCCI V-3 / 2015.04</b>            | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>AS/NZS CISPR22:2009 +A1:2010</b>  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>47 CFR Part 15, Subpart B</b>     |                                  |                                  |
| <input type="checkbox"/> CISPR 22:2009 +A1:2010               | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2009                      |                                  |                                  |
| <input type="checkbox"/> <b>IC Regulation ICES-003 : 2016</b> |                                  |                                  |
| <input type="checkbox"/> CAN/CSA CISPR 22-10                  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2014                      |                                  |                                  |
| <input type="checkbox"/> <b>RE- Directive 2014/53/EU</b>      |                                  |                                  |
| <input type="checkbox"/> EN 301 489-1 V1.9.2                  |                                  |                                  |
| <input type="checkbox"/> Equipment for fixed use              |                                  |                                  |
| <input type="checkbox"/> Equipment for vehicular use          |                                  |                                  |
| <input type="checkbox"/> Equipment for portable use           |                                  |                                  |
| <input type="checkbox"/> EN 301 489-3 V1.6.1                  |                                  |                                  |
| <input type="checkbox"/> EN 301 489-17 V2.2.1                 |                                  |                                  |
| <input type="checkbox"/> EN 60945:2002                        |                                  |                                  |

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## 2.1 Conducted Emissions at Mains Power Ports

**Test Date**

Nov, 28, 2016

**Test Location**

Electro wave Shieldroom

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101137	02, 04, 2017
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101786	05, 02, 2017
<input checked="" type="checkbox"/>	Electro wave Shieldroom	-	SEMITEC	-	-
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R&S	9.12.00	-

**Test Conditions**

Temperature: 17,4 °C

Relative Humidity: 41,7 %

**Frequency Range of Measurement**

150 kHz to 30 MHz

**Instrument Settings**

IF Band Width: 9 kHz

**Test Results**

The requirements are:

- PASS  
 NOT PASS  
 NOT APPLICABLE

**Remarks**See Appendix A for test data.

## 2.2 Conducted Emissions at Telecommunication Ports

### Test Date

Nov, 28, 2016

### Test Location

Electro wave Shieldroom

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	R&S	101783	05, 03, 2017
<input checked="" type="checkbox"/>	LISN	ENV216	R&S	101137	02, 04, 2017
<input checked="" type="checkbox"/>	LISN	ENV216	R&S	101786	05, 02, 2017
<input checked="" type="checkbox"/>	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 01, 2017
<input checked="" type="checkbox"/>	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 01, 2017
<input type="checkbox"/>	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08, 11, 2017
<input checked="" type="checkbox"/>	Electro wave Shieldroom	-	SEMITEC	-	-
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R&S	9.12.00	-

### Test Conditions

Temperature: 17,4 °C

Relative Humidity: 41,7 %

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

### Test Date

Nov, 28, 2016

### Test Location

Open Area Test Site #1       Open Area Test Site #2

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESR3	R&S	101781	05, 03, 2017
<input checked="" type="checkbox"/>	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	9163-713	05, 15, 2017
<input checked="" type="checkbox"/>	Open Area Test Site	-	KES	-	-
<input checked="" type="checkbox"/>	Antenna Mast	-	DAEIL EMC	-	-
<input checked="" type="checkbox"/>	Turn Table	-	DAEIL EMC	-	-
<input checked="" type="checkbox"/>	EMI Test S/W	-	-	-	-

### Test Conditions

Temperature: 3,9 °C  
Relative Humidity: 65,0 %

### Frequency Range of Measurement

30 MHz to 1 GHz

### Instrument Settings

IF Band Width: 120 kHz

### Test Results

The requirements are:

- PASS  
 NOT PASS  
 NOT APPLICABLE

### Remarks

See Appendix A for test data.

## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

**Test Date**

Nov, 28, 2016

**Test Location**

Semi Anechoic Chamber #2

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
<input checked="" type="checkbox"/>	EMI Test Receiver	ESU26	R&S	100552	04, 24, 2017
<input checked="" type="checkbox"/>	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
<input checked="" type="checkbox"/>	Semi Anechoic Chamber #2	-	SEMITEC	-	-
<input checked="" type="checkbox"/>	Antenna Mast	-	AUDIX	-	-
<input checked="" type="checkbox"/>	Turn Table	-	AUDIX	-	-
<input checked="" type="checkbox"/>	EMI Test S/W	e3	AUDIX	8.083b	-

**Test Conditions**

Temperature: 17,4 °C

Relative Humidity: 41,7 %

**Frequency Range of Measurement**

1 GHz to 6 GHz

**Instrument Settings**

IF Band Width: 1 MHz

**Test Results**

The requirements are:

- PASS  
 NOT PASS  
 NOT APPLICABLE

**Remarks**See Appendix A for test data.

## 2.5 Harmonic Current Emissions

**Test Date**

N/A

**Test Location**

Electro wave Shieldroom

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	AC Source	ACS 500 N	EM TEST	V1024106760	08, 08, 2017
<input type="checkbox"/>	Digital Power Analyzer	DPA 500 N	EM TEST	V1024106759	08, 08, 2017
<input type="checkbox"/>	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

**Test Conditions**

Temperature: °C

Relative Humidity: %

**Classification of Equipment for Harmonic Current Emissions**

- Class A
- Class B
- Class C(Below 25 W)
- Class C(Above 25 W)
- Class D

**Test Results**

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

**Remarks**N/A : Because the E.U.T power is less than 75 W, limits are not specified.



## 2.6 Voltage Fluctuations and Flicker

### Test Date

N/A

### Test Location

Electro wave Shieldroom

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	AC Source	ACS 500 N	EM test	V1024106760	08, 08, 2017
<input type="checkbox"/>	Digital Power Analyzer	DPA 500 N	EM test	V1024106759	08, 08, 2017
<input type="checkbox"/>	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

### Test Conditions

Temperature: °C  
Relative Humidity: %

### Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

### Remarks

N/A : Because the E.U.T power is less than 75 W, limits are not specified.

### 3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

#### Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

#### Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

#### Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing  
That there is no residual is permissible, providing that there is no residual change in the EUT or any  
change in outputs, which could be interpreted by associated equipment as a change.

### **Conducted RF immunity**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing  
That there is no residual is permissible, providing that there is no residual change in the EUT or any  
change in outputs, which could be interpreted by associated equipment as a change,  
and no such flickering of indicators oeuvres at  $U = 130 \text{ dB}\mu\text{V}$ .

For component of CCTV systems, where the status is monitored by observing the TV picture,  
then deterioration of the picture is allowed at  $U = 140 \text{ dB}\mu\text{V}$ , providing:

- (a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at  $U = 130 \text{ dB}\mu\text{V}$ , any deterioration of the picture is so minor that the system could  
still be used; and
- (c) there in no observable deterioration of the picture at  $U = 120 \text{ dB}\mu\text{V}$ .

### **Voltage dip/interruption / Voltage variation**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the conditioning is permissible, providing that there is no residual  
change in the EUT or any change in outputs, which could be interpreted by associated equipment  
as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

### 3.1 Electrostatic Discharge

**Reference Standard**

EN 61000-4-2:2009

**Test Date**

Nov, 28, 2016

**Test Location**

EMS-ESD: Electro wave Shieldroom

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02, 24, 2017
<input checked="" type="checkbox"/>	HCP	-	Noise Ken	-	-
<input checked="" type="checkbox"/>	VCP	-	Noise Ken	-	-
<input checked="" type="checkbox"/>	EMS Test S/W	N/A	N/A	N/A	-

**Test Conditions**

Temperature: 17,4 °C  
Relative Humidity: 41,7 %  
Atmospheric Pressure: 101,7 kPa

**Test Specifications**

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge  
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	<input type="checkbox"/> 2 kV	<input checked="" type="checkbox"/> 2 kV	<input type="checkbox"/> 2 kV	<input type="checkbox"/> 2 kV
	<input type="checkbox"/> 4 kV	<input checked="" type="checkbox"/> 4 kV	<input type="checkbox"/> 4 kV	<input type="checkbox"/> 4 kV
	<input checked="" type="checkbox"/> 6 kV	<input type="checkbox"/> 6 kV	<input checked="" type="checkbox"/> 6 kV	<input checked="" type="checkbox"/> 6 kV
	<input type="checkbox"/> 8 kV	<input checked="" type="checkbox"/> 8 kV	<input type="checkbox"/> 8 kV	<input type="checkbox"/> 8 kV
	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV


Notes: HCP: Horizontal coupling plane  
VCP: Vertical coupling plane

Required Performance Criteria:  Complied


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**Location of Discharge:**

- AC Mode



1

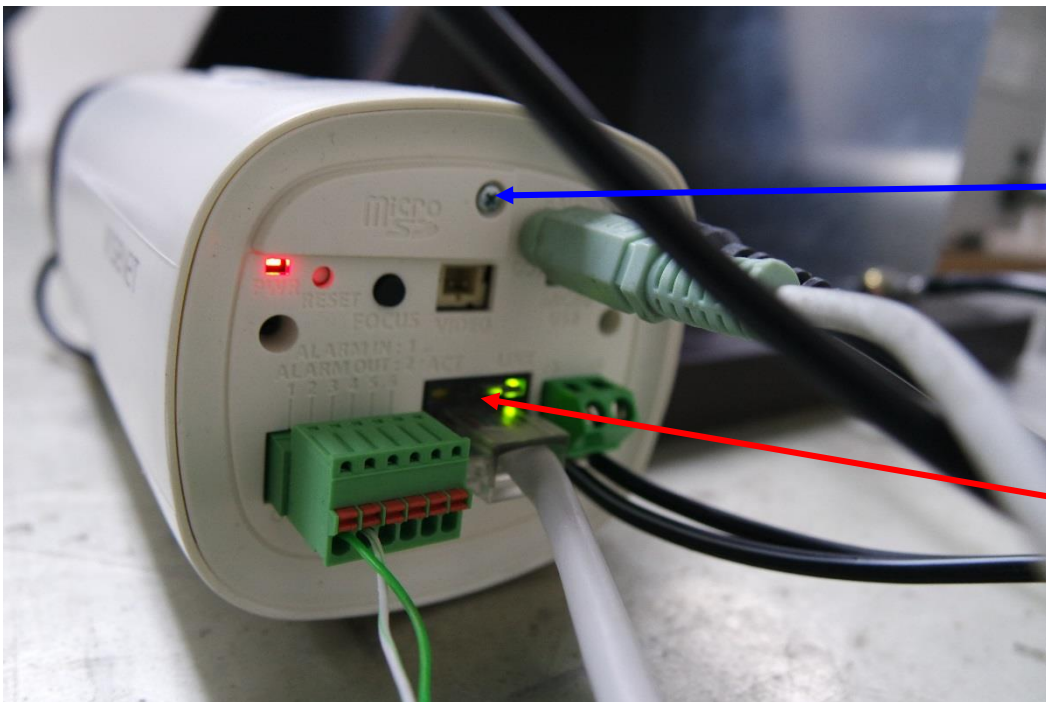


2

3

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




- DC Mode

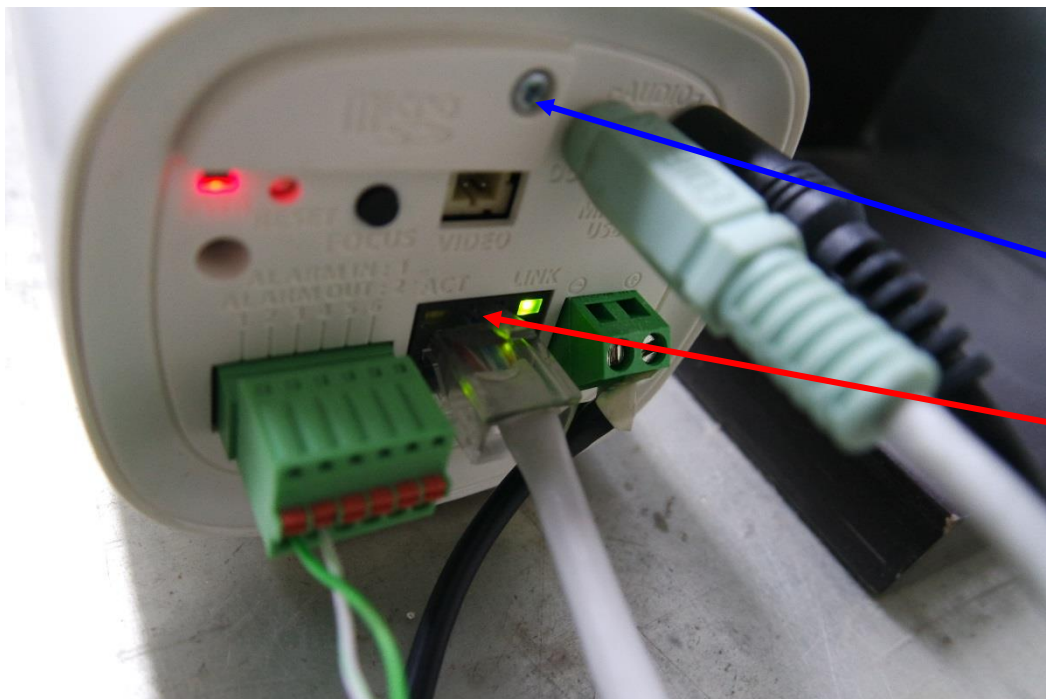

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

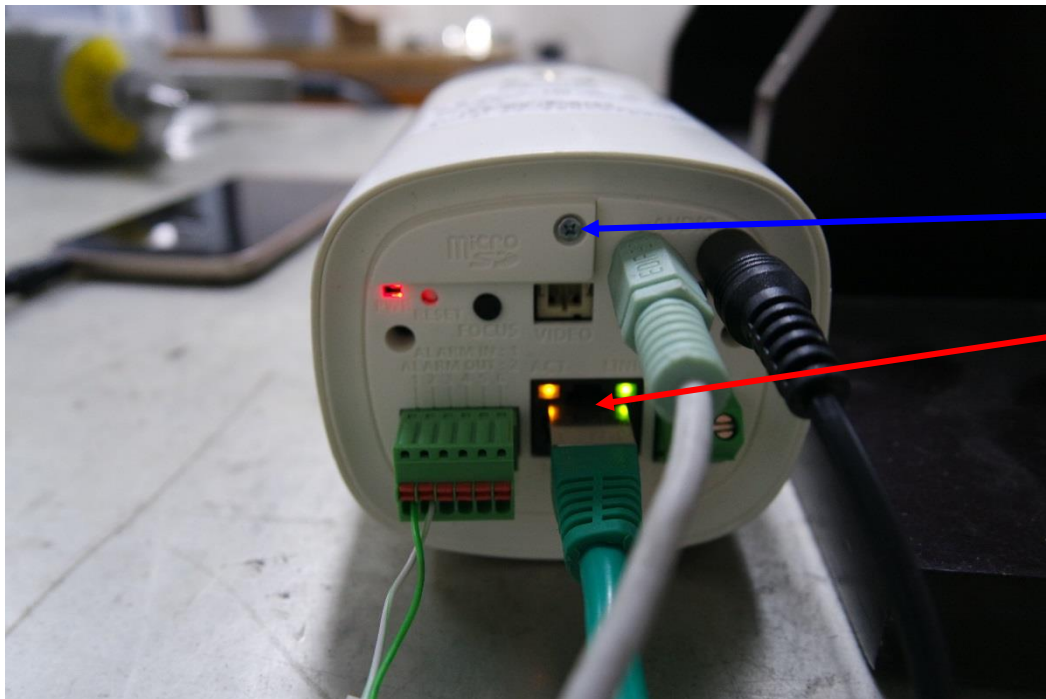

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## Test Data

### - AC Mode

#### Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

#### Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw 1	Contact Discharge	Complied	-
2	Screw 2	Contact Discharge	Complied	-
3	Port	Air Discharge	Complied	

### - DC Mode

#### Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

#### Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw 1	Contact Discharge	Complied	-
2	Screw 2	Contact Discharge	Complied	-
3	Port	Air Discharge	Complied	



- POE Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw 1	Contact Discharge	Complied	-
2	Screw 2	Contact Discharge	Complied	-
3	Port	Air Discharge	Complied	

Note: "Blank" = Not performed

Observations:  
Complied – No degradation of function

**Test Results**

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.

## 3.2 Radiated Electric Field Immunity

### Reference Standard

EN 61000-4-3:2006 +A2:2010

### Test Date

Nov, 29, 2016

### Test Location

EMS-RS:  Semi Anechoic Chamber #1       Semi Anechoic Chamber #2

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 08, 2017
<input checked="" type="checkbox"/>	BROADBAND AMPLIFIER	BBA100	Rohde & Schwarz	101239	08, 08, 2017
<input checked="" type="checkbox"/>	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 08, 2017
<input checked="" type="checkbox"/>	POWER METER	NRP2	Rohde & Schwarz	103475	08, 08, 2017
<input checked="" type="checkbox"/>	AVG POWER SENSOR	NRP-Z91	Rohde & Schwarz	102526	08, 08, 2017
<input checked="" type="checkbox"/>	AVG POWER SENSOR	NRP-Z91	Rohde & Schwarz	102527	08, 08, 2017
<input checked="" type="checkbox"/>	Stacked Log.-Per.Antenna	STLP 9128 D	Schwarzbeck	9128D038	-
<input checked="" type="checkbox"/>	DIRECTIONAL COUPLER	KYDC-D1070-DX40	Kytelecom Co., Ltd.	KY150001	08, 08, 2017
<input checked="" type="checkbox"/>	Semi Anechoic Chamber #2	-	SEMITEC	-	-
<input checked="" type="checkbox"/>	EMS Test S/W	EMC32	R&S	9.12.00	-

### Test Conditions

Temperature: 17,1 °C  
Relative Humidity: 42,0 %  
Atmospheric Pressure: 102,4 kPa



### Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance:  3 m

Field Strength:  1 V/m  3 V/m  
 10 V/m

Frequency Range:  80 MHz to 1 GHz  1,4 GHz to 2,7 GHz  
 80 MHz to 2,7 GHz

Modulation:  AM, 80 %, 1 kHz sine wave  
 PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step:  1 % step

Dwell Time:  1 s  3 s

# of Sides Radiated:  4

Required Performance Criteria:  Complied



### Test Data

- AC Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- DC Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- POE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:  
Complied – No degradation of function

### Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

### Remarks

PASS Required Performance Criteria.

### 3.3 Electrical Fast Transients/Bursts

**Reference Standard**

EN 61000-4-4:2012

**Test Date**

Nov, 30, 2016

**Test Location**

EMS-EFT: Electro wave Shieldroom

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
<input checked="" type="checkbox"/>	Capacitive Coupling Clamp	HFK	EM TEST	070925	06, 27, 2017
<input checked="" type="checkbox"/>	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

**Test Conditions**

Temperature: 18,2 °C  
Relative Humidity: 43,7 %  
Atmospheric Pressure: 101,5 kPa

**Test Specifications**

Pulse Amplitude & Polarity:  
(AC Power Lines)  ± 1.0 kV  ± 2.0 kV  
 ± 4.0 kV

Pulse Amplitude & Polarity:  
(Other supply / Signal Lines)  ± 0.5 kV  ± 1.0 kV  
 ± 2.0 kV

Burst Period:  300 ms  2 s

Repetition Rate:  5 kHz  100 kHz

Duration of Test Voltage:  ≥ 1 min

Required Performance Criteria:  Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



### Test Data

- AC Mode

Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L – N	Complied	Complied

Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

- DC Mode

Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L1 – L2	Complied	Complied

Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

Note: “Blank” = Not performed

Observations:  
 Complied – No degradation of function

**Test Results**

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.

## 3.4 Surge Transients

**Reference Standard**

EN 61000-4-5:2014

**Test Date**

Nov, 30, 2016

**Test Location**

EMS-Surge: Electro wave Shieldroom

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
<input checked="" type="checkbox"/>	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
<input type="checkbox"/>	CDN	CNV 504N	EM TEST	V0936105121	06, 27, 2017
<input checked="" type="checkbox"/>	CDN	CNV 508T5	EM TEST	P1549168422	04, 27, 2017
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

**Test Conditions**Temperature: 18,2 °C  
Relative Humidity: 43,7 %  
Atmospheric Pressure: 101,5 kPa



## Test Specifications

### AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

(0,5 / 1,0 / 2,0) kV

Differential Mode

(0,5 / 1,0) kV

Number of Surges:

5 surges per angle

Angle:

0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

Positive & Negative

Repetition Rate:

1 surge per min     1 surge per 30 sec.

Required Performance Criteria:  Complied

### Other supply / Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude:

Common Mode

(0,5 / 1,0) kV

Number of Surges:

5 Surges

Polarity:

Positive & Negative

Repetition Rate:

1 surge per min     1 surge per 30 sec.

Required Performance Criteria:  Complied

**Test Data**

- AC Mode

Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied
L – PE	-	-
N – PE	-	-

Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

**Signal Lines**

Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

- DC Mode

Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-
L – PE	-	-
N – PE	-	-

Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L1 – PE	Complied	Complied
L2 – PE	Complied	Complied

**Signal Lines**

Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-
L – PE	-	-
N – PE	-	-

Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

**Signal Lines**

Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

Note: “Blank” = Not performed

Observations:  
 Complied – No degradation of function

**Test Results**

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.

### 3.5 Conducted Disturbance

**Reference Standard**

EN 61000-4-6:2014

**Test Date**

Nov, 30, 2016

**Test Location**

EMS-CS: Electro wave Shieldroom

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	Continuous Wave Generator	CWS 500N1	EM TEST	V0936105119	08, 08, 2017
<input checked="" type="checkbox"/>	6 dB Attenuator	ATT6	EM TEST	1208-34	08, 08, 2017
<input checked="" type="checkbox"/>	CDN	CDN-M2/M3N	EM TEST	0909-06	08, 08, 2017
<input type="checkbox"/>	CDN	CDN-T2-RJ11	EM TEST	0909-07	08, 08, 2017
<input type="checkbox"/>	CDN	CDN-T4	EM TEST	0909-08	08, 08, 2017
<input type="checkbox"/>	CDN	CDN-T8RJ45	EM TEST	0909-09	08, 08, 2017
<input type="checkbox"/>	CDN	CDN-AF2	EM TEST	0909-10	08, 08, 2017
<input type="checkbox"/>	CDN	CDN-AF4	EM TEST	0909-11	08, 08, 2017
<input checked="" type="checkbox"/>	EM Injection Clamp	EM 101	Liithi	35943	02, 04, 2017
<input checked="" type="checkbox"/>	EMS Test S/W	icd.control	EM TEST AG	5.3.7	-

**Test Conditions**

Temperature: 18,2 °C  
 Relative Humidity: 43,7 %  
 Atmospheric Pressure: 101,5 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-16T0608-R1  
Page (40) of (98)

---

**Test Specifications**

- Frequency range:  150 kHz to 100 MHz  150 kHz to 80 MHz
- Voltage Level:  1 Vrms  3 Vrms  
 10 Vrms
- Modulation:  AM, 80 %, 1 kHz sine wave  
 PM, 1 Hz (0,5 s ON : 0,5 s OFF)
- Frequency step:  1 % step
- Dwell Time:  1 s  3 s
- Required Performance Criteria:  Complied

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



**Test Data**

- AC Mode

Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N	CDN ( <input checked="" type="checkbox"/> M2, <input type="checkbox"/> M3)	Complied

Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3)	-

Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

- DC Mode

Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3)	-

Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L1 - L2	CDN ( <input checked="" type="checkbox"/> M2, <input type="checkbox"/> M3)	Complied

Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied



- POE Mode

Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3)	-

Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3)	-

Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

Notes: CDN = Coupling Decoupling Network  
"blank" = Not performed

Observations:  
Complied – No degradation of function

**Test Results**

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.

## 3.6 Voltage Dips and Short Interruptions

### Reference Standard

EN 61000-4-11:2004

### Test Date

Nov, 30, 2016

### Test Location

EMS-Voltage dip: Electro wave Shieldroom

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
<input checked="" type="checkbox"/>	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

### Test Conditions

Temperature: 18,2 °C  
Relative Humidity: 43,7 %  
Atmospheric Pressure: 101,5 kPa



---

## Test Specifications & Observations/Remarks

- AC Mode

(Test Voltage : 50 Hz)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
<input checked="" type="checkbox"/> 20 % dip	<input checked="" type="checkbox"/> 250 /5000	<u>Complied</u>
<input checked="" type="checkbox"/> 30 % dip	<input checked="" type="checkbox"/> 25 /500	<u>Complied</u>
<input checked="" type="checkbox"/> 60 % dip	<input checked="" type="checkbox"/> 10 /200	<u>Complied</u>
<input checked="" type="checkbox"/> 100 % dip	<input checked="" type="checkbox"/> 250 /5000	<u>Complied</u>

- Voltage variations

<input checked="" type="checkbox"/> Unom + 10 %	<input checked="" type="checkbox"/> 253 V (ac)	<u>Complied</u>
<input checked="" type="checkbox"/> Unom - 15 %	<input checked="" type="checkbox"/> 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

### Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- NOT APPLICABLE

### Remarks

PASS Required Performance Criteria.

## APPENDIX A – TEST DATA


### Conducted Emissions at Mains Power Ports

- AC Mode

[HOT]

#### Common Information

Test Description:	Conducted Emission
Model No.:	XNB-8000P
Mode	AC
Operator Name:	KES

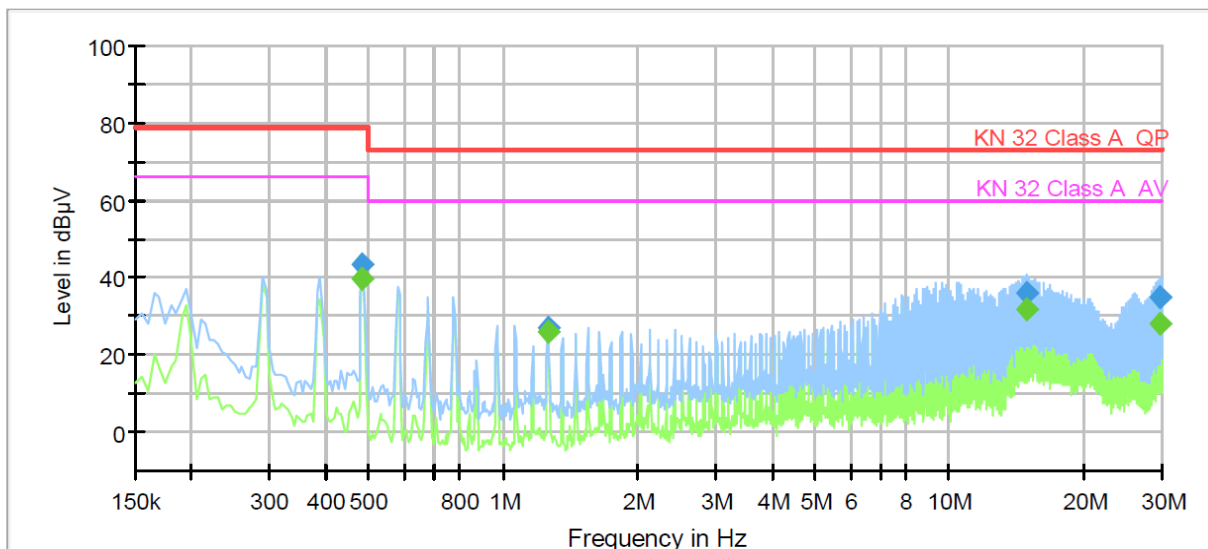

#### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.485000	---	39.53	66.00	26.47	1000.0	9.000	L1	9.8
0.485000	43.53	---	79.00	35.47	1000.0	9.000	L1	9.8
1.260000	---	26.01	60.00	33.99	1000.0	9.000	L1	10.1
1.260000	26.84	---	73.00	46.16	1000.0	9.000	L1	10.1
14.835000	---	31.63	60.00	28.37	1000.0	9.000	L1	10.1
14.835000	36.25	---	73.00	36.75	1000.0	9.000	L1	10.1
29.575000	---	28.28	60.00	31.72	1000.0	9.000	L1	10.4
29.575000	35.12	---	73.00	37.88	1000.0	9.000	L1	10.4

#### ◆ Calculation

QuasiPeak [dBµV] / CAverage [dBµV] = Reading Value [dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[NEUTRAL]

### Common Information

Test Description:	Conducted Emission
Model No.:	XNB-8000P
Mode	AC
Operator Name:	KES

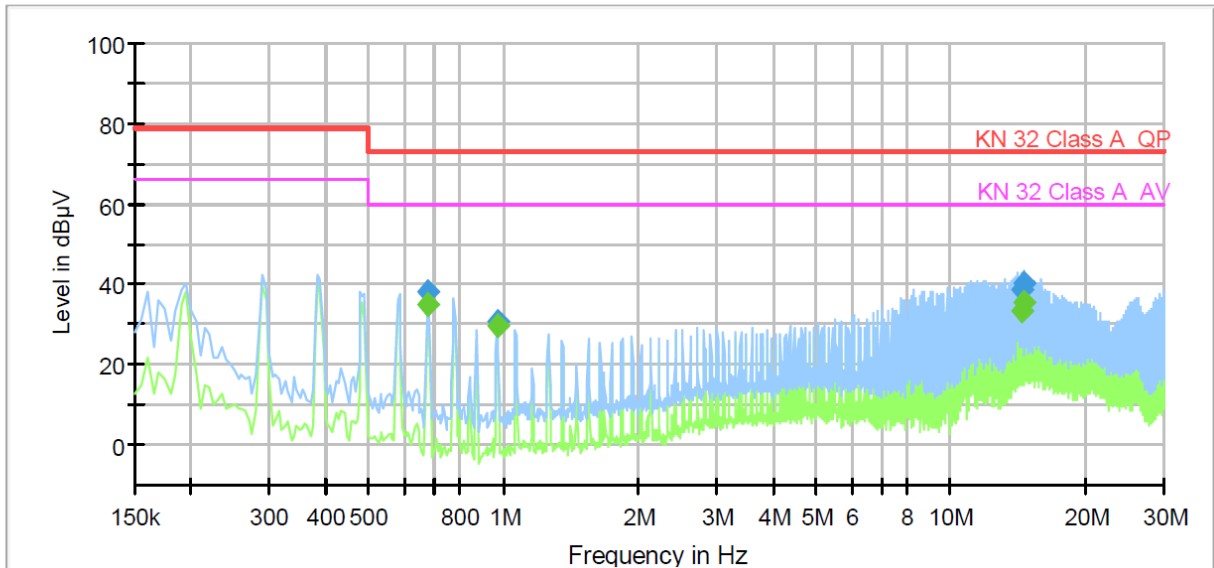

### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.680000	---	34.85	60.00	25.15	1000.0	9.000	N	9.9
0.680000	38.21	---	73.00	34.79	1000.0	9.000	N	9.9
0.970000	---	29.84	60.00	30.16	1000.0	9.000	N	10.0
0.970000	30.83	---	73.00	42.17	1000.0	9.000	N	10.0
14.355000	---	33.43	60.00	26.57	1000.0	9.000	N	10.1
14.355000	38.49	---	73.00	34.51	1000.0	9.000	N	10.1
14.550000	---	35.53	60.00	24.47	1000.0	9.000	N	10.1
14.550000	39.98	---	73.00	33.02	1000.0	9.000	N	10.1

◆ Calculation

QuasiPeak [dBµV] / CAverage [dBµV] = Reading Value [dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR+ Cable Loss)


## Conducted Emissions at Telecommunication Ports

- AC Mode

[10 Mbps]

### Common Information

Test Description:	Telecommunication Emission
Model No.:	XNB-8000P
Mode	AC_10M
Operator Name:	KES

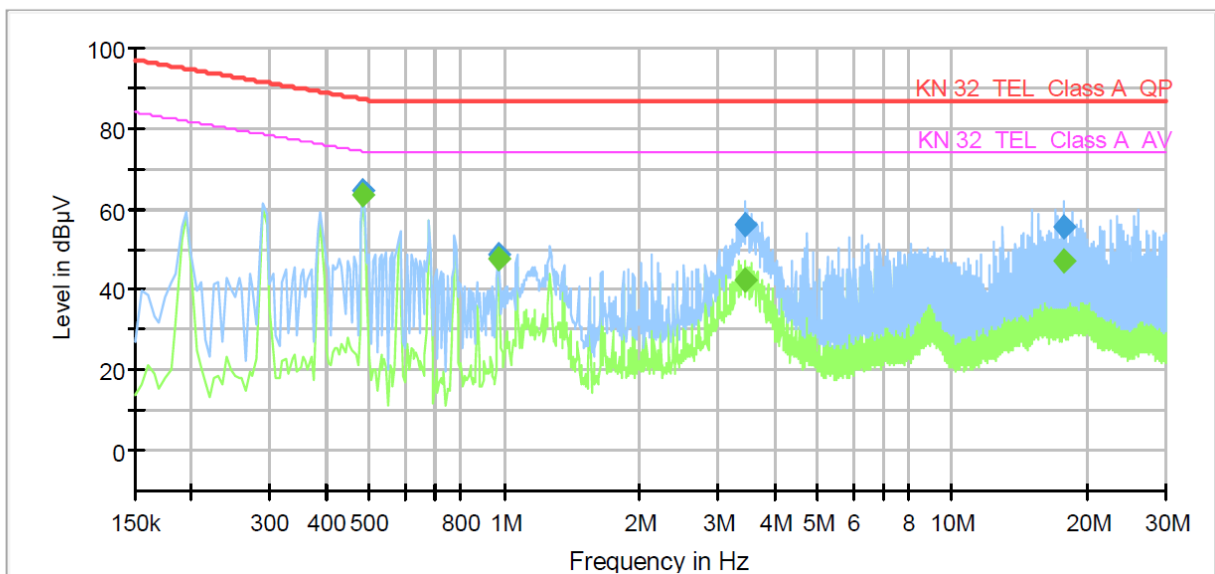

### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.485000	---	63.53	74.25	10.72	1000.0	9.000	Single Line	10.1
0.485000	64.70	---	87.25	22.55	1000.0	9.000	Single Line	10.1
0.970000	---	47.78	74.00	26.22	1000.0	9.000	Single Line	10.2
0.970000	48.49	---	87.00	38.51	1000.0	9.000	Single Line	10.2
3.460000	---	42.15	74.00	31.85	1000.0	9.000	Single Line	10.2
3.460000	56.07	---	87.00	30.93	1000.0	9.000	Single Line	10.2
17.770000	---	47.33	74.00	26.67	1000.0	9.000	Single Line	10.2
17.770000	55.81	---	87.00	31.19	1000.0	9.000	Single Line	10.2

#### ◆ Calculation

QuasiPeak [dBµV] / CAverage [dBµV] = Reading Value [dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

**[100 Mbps]**

**Common Information**

Test Description:	Telecommunication Emission
Model No.:	XNB-8000P
Mode	AC_100M
Operator Name:	KES

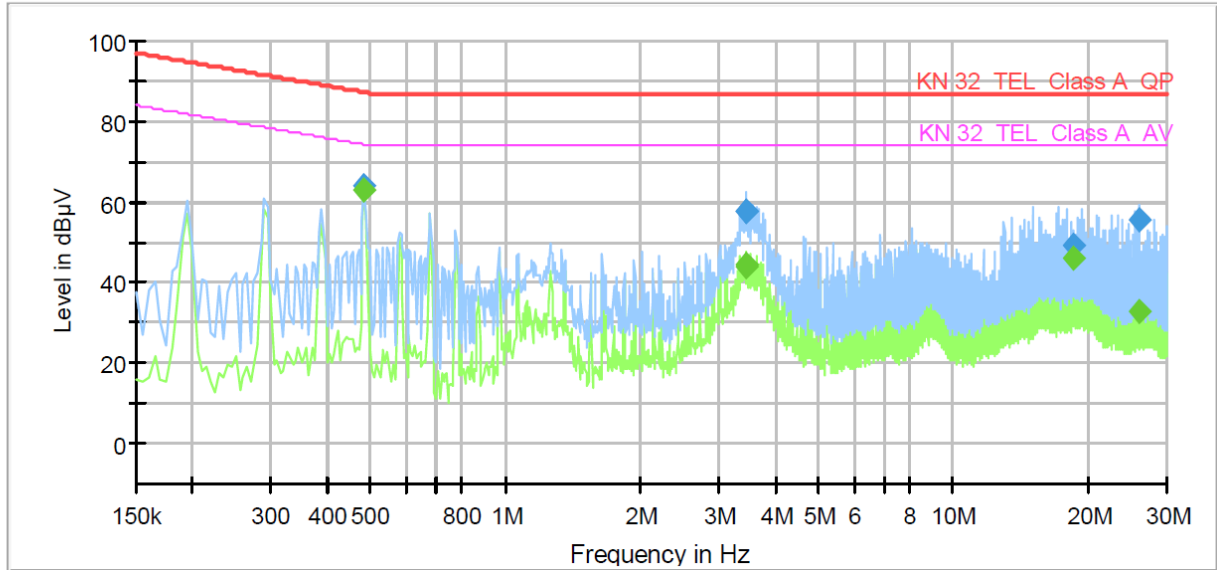

**Final Result**

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.485000	---	63.04	74.25	11.21	1000.0	9.000	Single Line	9.6
0.485000	64.27	---	87.25	22.98	1000.0	9.000	Single Line	9.6
3.450000	---	44.26	74.00	29.74	1000.0	9.000	Single Line	9.7
3.450000	57.60	---	87.00	29.40	1000.0	9.000	Single Line	9.7
3.455000	---	43.74	74.00	30.26	1000.0	9.000	Single Line	9.7
3.455000	57.46	---	87.00	29.54	1000.0	9.000	Single Line	9.7
18.550000	---	46.12	74.00	27.88	1000.0	9.000	Single Line	9.6
18.550000	49.15	---	87.00	37.85	1000.0	9.000	Single Line	9.6
26.015000	---	32.65	74.00	41.35	1000.0	9.000	Single Line	9.5
26.015000	55.36	---	87.00	31.64	1000.0	9.000	Single Line	9.5

◆ Calculation

QuasiPeak [dBµV] / CAverage [dBµV] = Reading Value [dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)




- DC Mode

**[10 Mbps]**

### Common Information

Test Description:	Telecommunication Emission
Model No.:	XNB-8000P
Mode	DC_10M
Operator Name:	KES

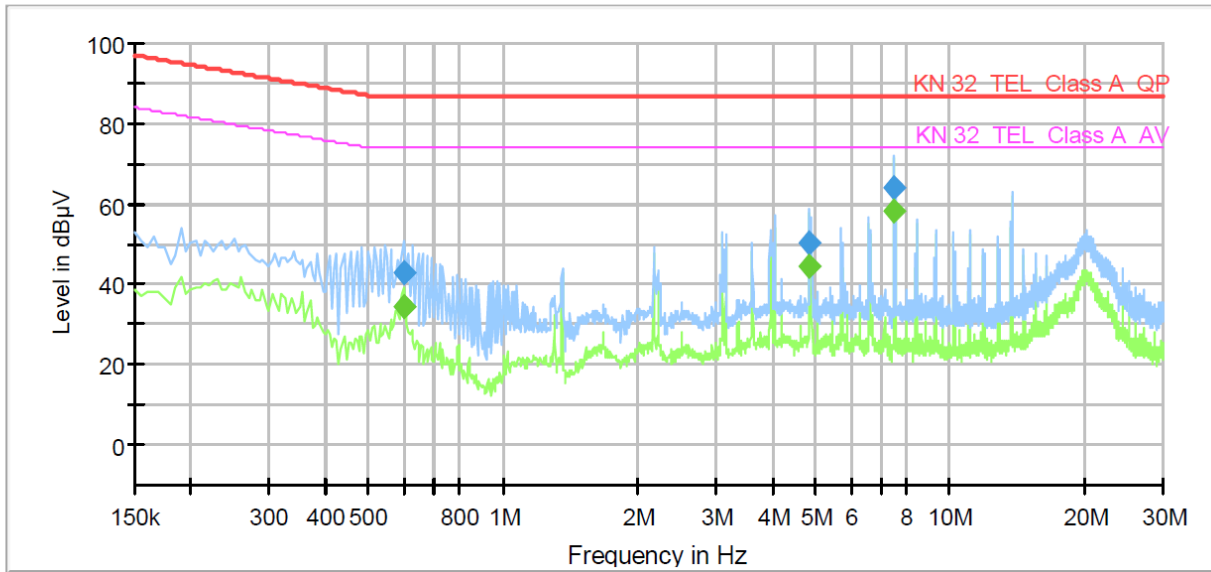

### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.600000	---	34.32	74.00	39.68	1000.0	9.000	Single Line	10.1
0.600000	43.01	---	87.00	43.99	1000.0	9.000	Single Line	10.1
4.835000	---	44.61	74.00	29.39	1000.0	9.000	Single Line	10.1
4.835000	50.12	---	87.00	36.88	1000.0	9.000	Single Line	10.1
7.500000	---	58.38	74.00	15.62	1000.0	9.000	Single Line	10.0
7.500000	64.08	---	87.00	22.92	1000.0	9.000	Single Line	10.0

◆ Calculation

QuasiPeak [dBµV] / CAverage [dBµV] = Reading Value [dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[100 Mbps]

## Common Information

Test Description:	Telecommunication Emission
Model No.:	XNB-8000P
Mode	DC_100M
Operator Name:	KES

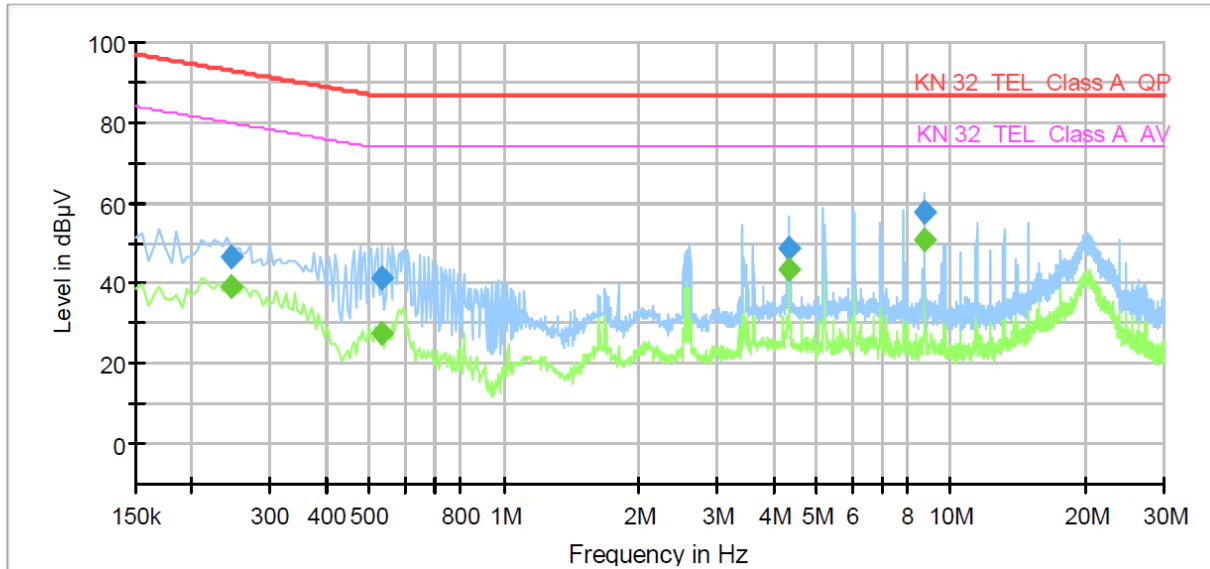

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.245000	---	39.18	79.92	40.74	1000.0	9.000	Single Line	9.6
0.245000	46.51	---	92.92	46.41	1000.0	9.000	Single Line	9.6
0.535000	---	27.56	74.00	46.44	1000.0	9.000	Single Line	9.6
0.535000	41.40	---	87.00	45.60	1000.0	9.000	Single Line	9.6
4.350000	---	43.25	74.00	30.75	1000.0	9.000	Single Line	9.6
4.350000	48.75	---	87.00	38.25	1000.0	9.000	Single Line	9.6
8.750000	---	51.03	74.00	22.97	1000.0	9.000	Single Line	9.5
8.750000	57.64	---	87.00	29.36	1000.0	9.000	Single Line	9.5

### ◆ Calculation

QuasiPeak [dBµV] / CAverage [dBµV] = Reading Value [dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (ISN FACTOR+ Cable Loss)

- POE Mode

**[10 Mbps]**

## Common Information

Test Description:	Telecommunication Emission
Model No.:	XNB-8000P
Mode	POE_10M
Operator Name:	KES

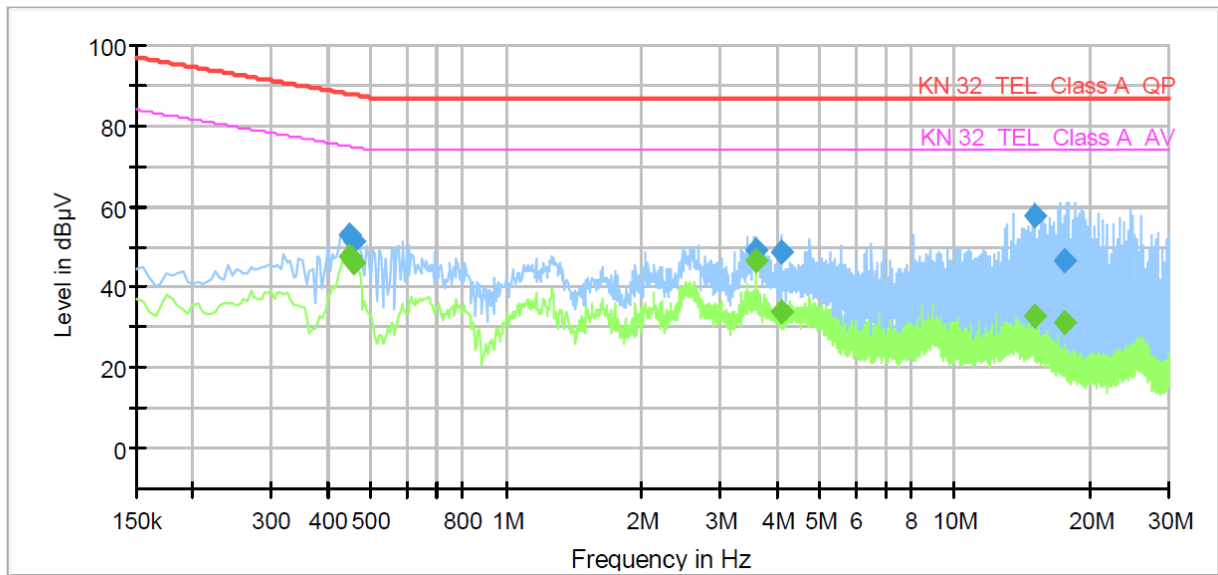

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.445000	---	47.87	74.97	27.10	1000.0	9.000	Single Line	10.1
0.445000	53.12	---	87.97	34.85	1000.0	9.000	Single Line	10.1
0.455000	---	46.10	74.78	28.68	1000.0	9.000	Single Line	10.1
0.455000	51.59	---	87.78	36.19	1000.0	9.000	Single Line	10.1
3.600000	---	46.63	74.00	27.37	1000.0	9.000	Single Line	10.2
3.600000	49.46	---	87.00	37.54	1000.0	9.000	Single Line	10.2
4.090000	---	33.83	74.00	40.17	1000.0	9.000	Single Line	10.1
4.090000	48.87	---	87.00	38.13	1000.0	9.000	Single Line	10.1
15.025000	---	32.81	74.00	41.19	1000.0	9.000	Single Line	10.1
15.025000	57.54	---	87.00	29.46	1000.0	9.000	Single Line	10.1
17.570000	---	31.24	74.00	42.76	1000.0	9.000	Single Line	10.2
17.570000	46.84	---	87.00	40.16	1000.0	9.000	Single Line	10.2

### ◆ Calculation

QuasiPeak [dBµV] / CAverage [dBµV] = Reading Value [dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)

**[100 Mbps]**

**Common Information**

Test Description:	Telecommunication Emission
Model No.:	XNB-8000P
Mode	POE_100M
Operator Name:	KES

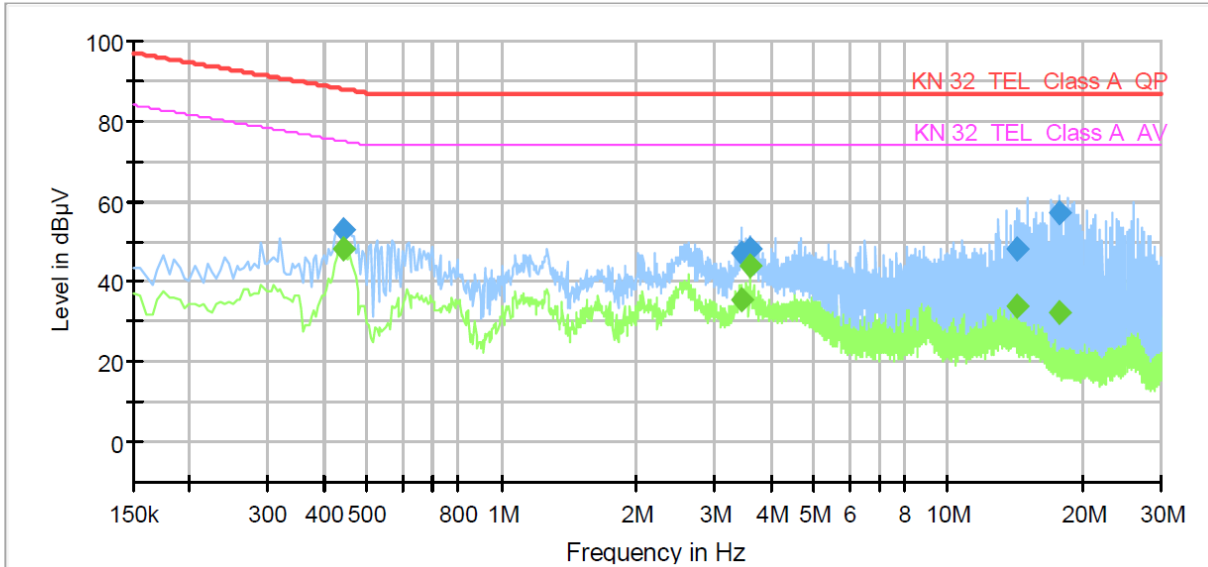

**Final Result**

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.440000	---	48.01	75.06	27.05	1000.0	9.000	Single Line	9.6
0.440000	52.98	---	88.06	35.08	1000.0	9.000	Single Line	9.6
3.450000	---	35.62	74.00	38.38	1000.0	9.000	Single Line	9.7
3.450000	47.17	---	87.00	39.83	1000.0	9.000	Single Line	9.7
3.600000	---	43.93	74.00	30.07	1000.0	9.000	Single Line	9.7
3.600000	48.03	---	87.00	38.97	1000.0	9.000	Single Line	9.7
14.275000	---	34.01	74.00	39.99	1000.0	9.000	Single Line	9.6
14.275000	47.91	---	87.00	39.09	1000.0	9.000	Single Line	9.6
17.770000	---	32.14	74.00	41.86	1000.0	9.000	Single Line	9.7
17.770000	57.18	---	87.00	29.82	1000.0	9.000	Single Line	9.7

◆ Calculation

QuasiPeak [dBµV] / CAverage [dBµV] = Reading Value [dBµV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR+ Cable Loss)



## Radiated Electric Field Emissions(Below 1 GHz)

- AC Mode

Frequency [MHz]	Amplitude [dB $\mu$ V]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor		Corrected Amplitude [dB $\mu$ V/m]	Applicable Limit [dB $\mu$ V/m]	Margin [dB]
				ANT. [dB/m]	Cable [dB]			
150.19	18.71	H	2.36	8.21	3.57	30.49	40.00	9.51
157.05	12.58	V	1.35	8.45	3.66	24.69	40.00	15.31
224.06	11.85	H	2.11	11.83	4.41	28.09	40.00	11.91
230.72	16.25	V	1.85	11.98	4.49	32.72	47.00	14.28
270.45	19.24	V	1.05	12.81	4.90	36.95	47.00	10.05
297.69	12.37	V	3.01	13.34	5.13	30.84	47.00	16.16
297.72	13.05	H	2.00	13.34	5.13	31.52	47.00	15.48
350.96	12.95	H	1.96	14.56	5.65	33.16	47.00	13.84

\* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB $\mu$ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss



- DC Mode

Frequency [MHz]	Amplitude [dBμV]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor		Corrected Amplitude [dBμV/m]	Applicable Limit [dBμV/m]	Margin [dB]
				ANT. [dB/m]	Cable [dB]			
151.24	10.52	H	2.36	8.24	3.58	22.34	40.00	17.66
155.10	11.58	V	1.52	8.38	3.63	23.59	40.00	16.41
220.01	12.25	H	2.01	11.74	4.36	28.35	40.00	11.65
229.79	11.09	H	1.95	11.96	4.47	27.52	40.00	12.48
251.07	10.23	V	3.02	12.43	4.73	27.39	47.00	19.61
297.69	13.20	H	1.22	13.34	5.13	31.67	47.00	15.33
473.24	11.28	V	3.01	16.73	6.89	34.90	47.00	12.10

\* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

- POE Mode

Frequency [MHz]	Amplitude [dBμV]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor		Corrected Amplitude [dBμV/m]	Applicable Limit [dBμV/m]	Margin [dB]
				ANT. [dB/m]	Cable [dB]			
152.26	13.25	H	2.31	8.28	3.60	25.13	40.00	14.87
155.00	15.68	V	2.00	8.38	3.63	27.69	40.00	12.31
223.03	11.25	H	1.52	11.81	4.39	27.45	40.00	12.55
223.94	11.01	V	1.66	11.83	4.40	27.24	40.00	12.76
260.80	13.25	H	3.01	12.62	4.81	30.68	47.00	16.32
270.54	13.20	V	1.25	12.81	4.90	30.91	47.00	16.09
320.01	14.21	H	2.01	13.84	5.35	33.40	47.00	13.60
370.41	11.98	V	1.09	15.01	5.86	32.85	47.00	14.15

\* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]


Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Radiated Electric Field Emissions(Above 1 GHz)

- AC Mode

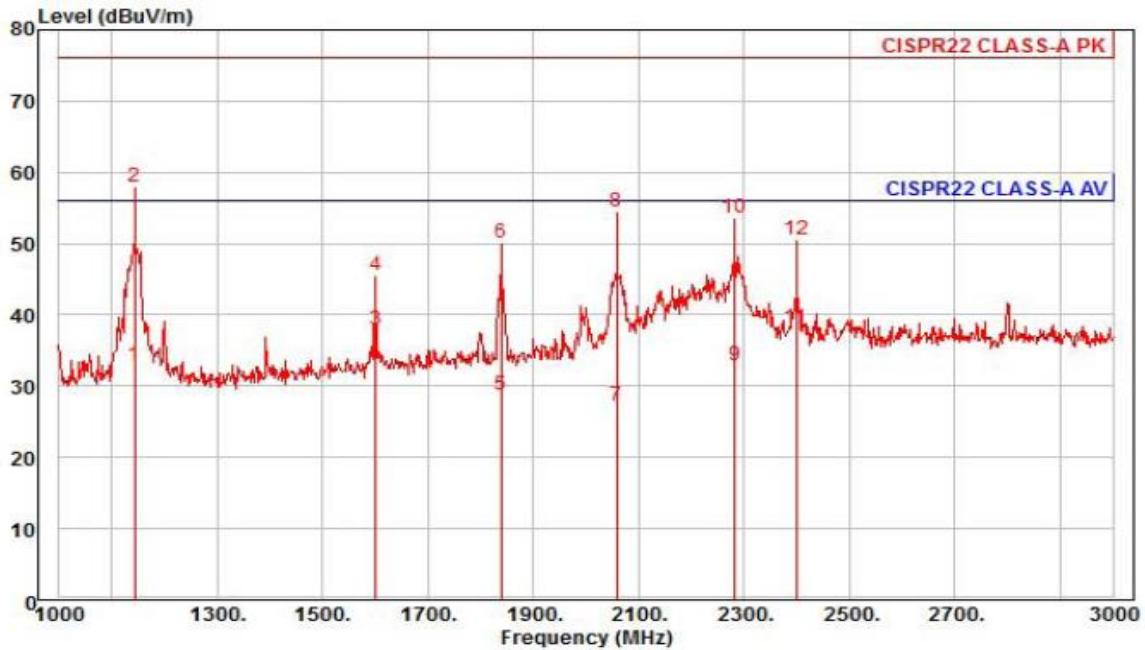

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNB-8000P  
Mode : AC  
Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1144.00	41.29	24.48	6.95	39.74	214	56.00	-23.02	horizontal	Average
2 pk	1144.00	66.34	24.48	6.95	39.74	214	76.00	-17.97	horizontal	Peak
3	1600.00	42.61	26.29	8.31	39.22	39	56.00	-18.01	horizontal	Average
4	1600.00	50.14	26.29	8.31	39.22	39	76.00	-30.48	horizontal	Peak
5	1840.00	31.89	27.24	8.93	39.34	28	56.00	-27.28	horizontal	Average
6	1840.00	53.20	27.24	8.93	39.34	28	76.00	-25.97	horizontal	Peak
7	2058.00	29.18	28.02	9.47	39.41	199	56.00	-28.74	horizontal	Average
8	2058.00	56.38	28.02	9.47	39.41	199	76.00	-21.54	horizontal	Peak
9	2282.00	33.82	28.57	10.02	39.42	56	56.00	-23.01	horizontal	Average
10	2282.00	54.42	28.57	10.02	39.42	56	76.00	-22.41	horizontal	Peak
11 pp	2400.00	38.44	28.86	10.32	39.42	51	56.00	-17.80	horizontal	Average
12	2400.00	50.83	28.86	10.32	39.42	51	76.00	-25.41	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

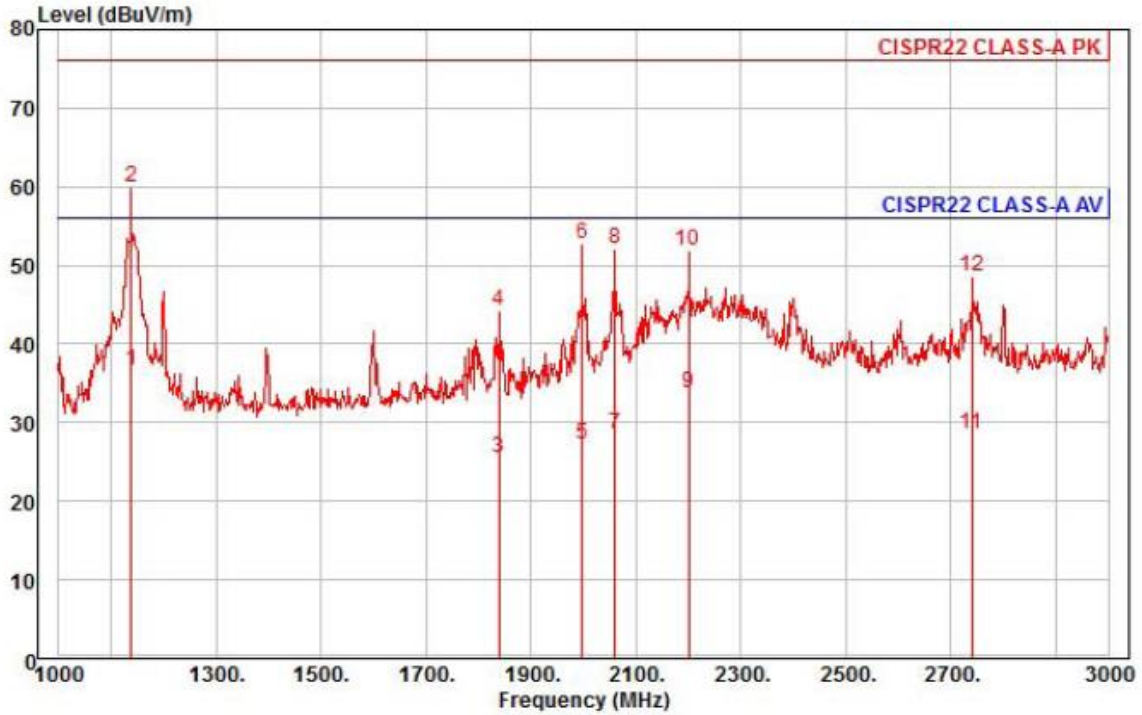

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNB-8000P  
 Mode : AC  
 Memo : 1 ~ 3 GHz

		Read	Ant	Cable	Preamp	TPos	Limit	Over			
	Freq	Level	Factor	Loss	Factor	deg	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB			
1	av	1138.00	44.94	24.46	6.93	39.76	172	56.00	-19.43	vertical	Average
2	pp	1138.00	68.22	24.46	6.93	39.76	172	76.00	-16.15	vertical	Peak
3		1840.00	28.60	27.24	8.93	39.34	160	56.00	-30.57	vertical	Average
4		1840.00	47.52	27.24	8.93	39.34	160	76.00	-31.65	vertical	Peak
5		1998.00	29.40	27.87	9.33	39.41	187	56.00	-28.81	vertical	Average
6		1998.00	54.91	27.87	9.33	39.41	187	76.00	-23.30	vertical	Peak
7		2060.00	30.45	28.03	9.48	39.41	218	56.00	-27.45	vertical	Average
8		2060.00	54.06	28.03	9.48	39.41	218	76.00	-23.84	vertical	Peak
9		2200.00	35.03	28.37	9.80	39.42	187	56.00	-22.22	vertical	Average
10		2200.00	53.05	28.37	9.80	39.42	187	76.00	-24.20	vertical	Peak
11		2740.00	27.59	29.69	11.09	39.81	333	56.00	-27.44	vertical	Average
12		2740.00	47.73	29.69	11.09	39.81	333	76.00	-27.30	vertical	Peak


◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level[dBuV]} + \text{Ant Factor[dB/m]} + \text{Cable Loss [dB]} - \text{Preamp Factor [dB]}) - \text{Limit Line[dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



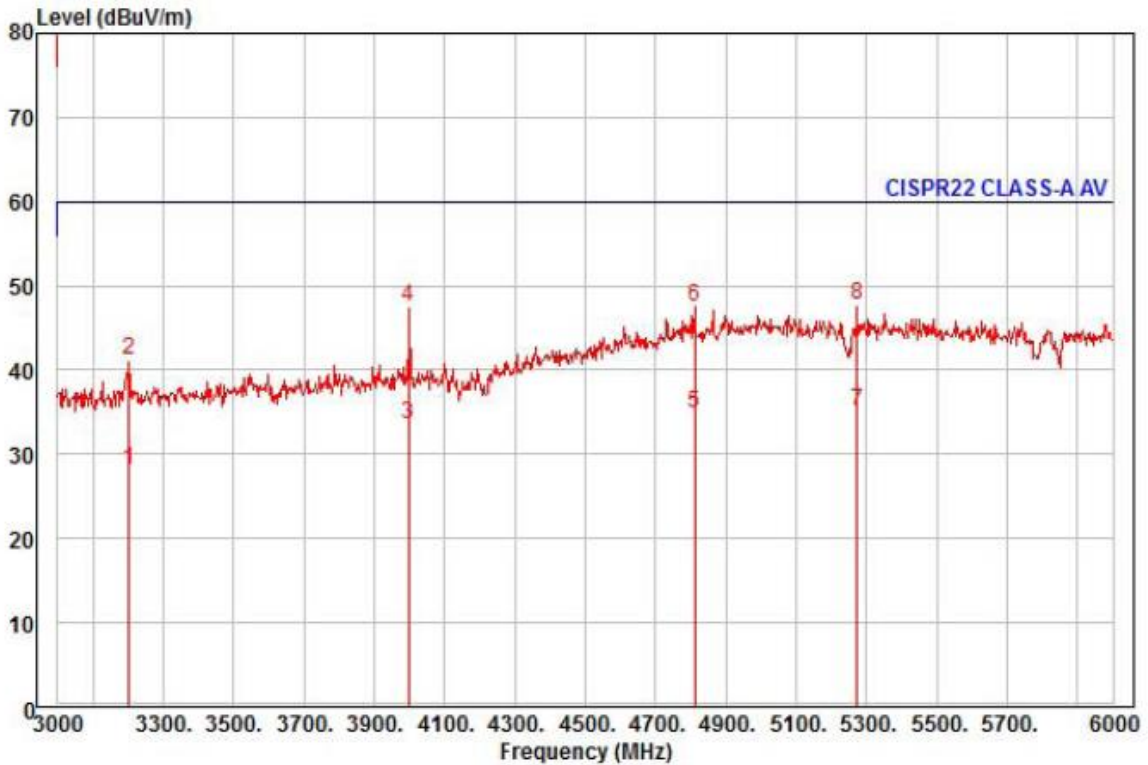

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNB-8000P  
 Mode : AC  
 Memo : 3 ~ 6 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3201.00	25.88	30.67	12.06	40.42	180	60.00	-31.81	horizontal Average
2	3201.00	38.92	30.67	12.06	40.42	180	80.00	-38.77	horizontal Peak
3	3999.00	28.64	32.01	13.56	40.70	36	60.00	-26.49	horizontal Average
4	3999.00	42.62	32.01	13.56	40.70	36	80.00	-32.51	horizontal Peak
5	4812.00	23.62	36.65	15.11	40.46	30	60.00	-25.08	horizontal Average
6	4812.00	36.33	36.65	15.11	40.46	30	80.00	-32.37	horizontal Peak
7 pp	5274.00	22.81	37.17	15.83	40.72	38	60.00	-24.91	horizontal Average
8 pk	5274.00	35.35	37.17	15.83	40.72	38	80.00	-32.37	horizontal Peak

◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level[dBuV]} + \text{Ant Factor[dB/m]} + \text{Cable Loss [dB]} - \text{Preamp Factor [dB]}) - \text{Limit Line[dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

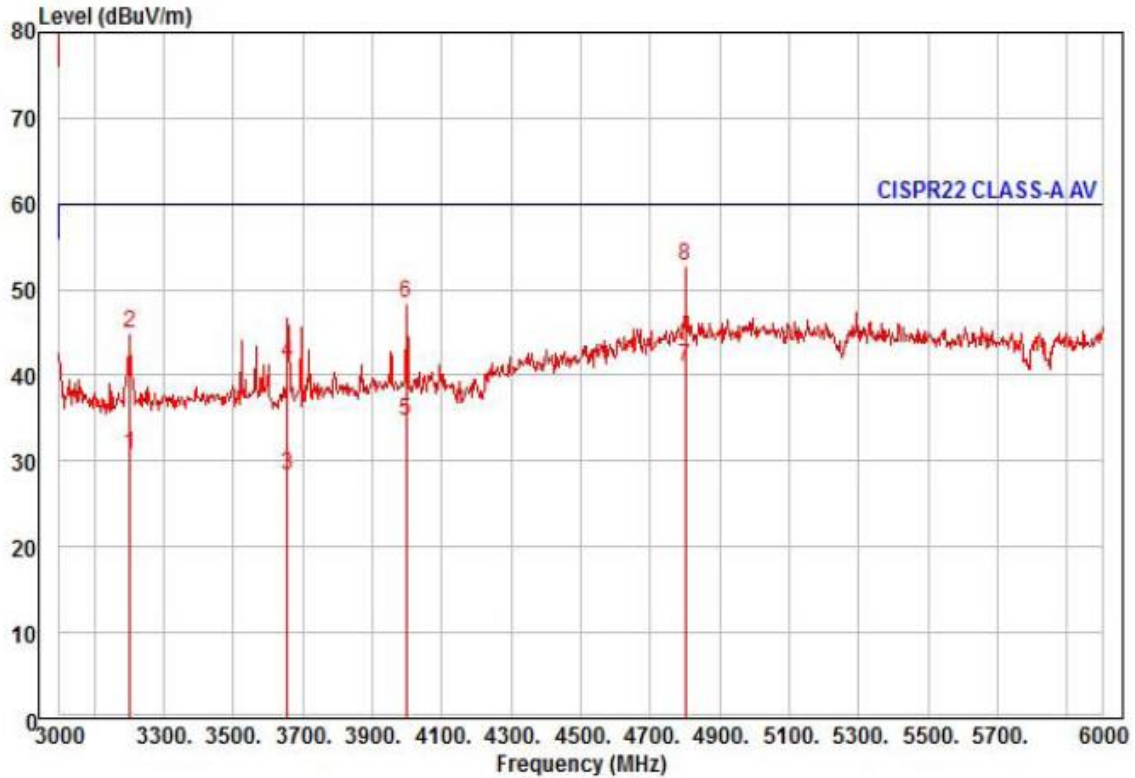

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNB-8000P  
 Mode : AC  
 Memo : 3 ~ 6 GHz

	Read Freq	Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3201.00	28.53	30.67	12.06	40.42	1	60.00	-29.16	vertical	Average
2	3201.00	42.57	30.67	12.06	40.42	1	80.00	-35.12	vertical	Peak
3	3657.00	24.73	31.43	12.91	40.82	171	60.00	-31.75	vertical	Average
4	3657.00	37.88	31.43	12.91	40.82	171	80.00	-38.60	vertical	Peak
5	3999.00	29.83	32.01	13.56	40.70	262	60.00	-25.30	vertical	Average
6	3999.00	43.62	32.01	13.56	40.70	262	80.00	-31.51	vertical	Peak
7 pp	4800.00	29.80	36.58	15.10	40.47	269	60.00	-18.99	vertical	Average
8 pk	4800.00	41.50	36.58	15.10	40.47	269	80.00	-27.29	vertical	Peak


◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level [dBuV]} + \text{Ant Factor [dB/m]} + \text{Cable Loss [dB]} - \text{Preamp Factor [dB]}) - \text{Limit Line [dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC Mode

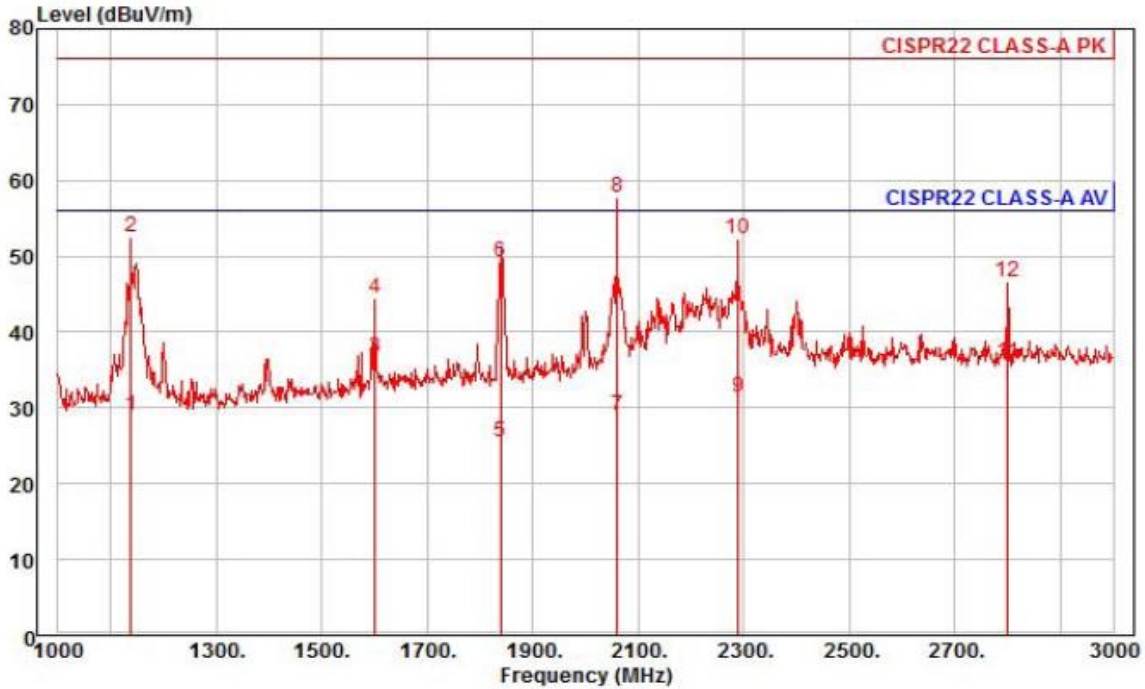

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNB-8000P  
 Mode : DC  
 Memo : 1 ~ 3 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1138.00	37.42	24.46	6.93	39.76	280	56.00	-26.95	horizontal Average
2	1138.00	60.93	24.46	6.93	39.76	280	76.00	-23.44	horizontal Peak
3 av	1600.00	41.16	26.29	8.31	39.22	47	56.00	-19.46	horizontal Average
4	1600.00	49.13	26.29	8.31	39.22	47	76.00	-31.49	horizontal Peak
5	1840.00	28.65	27.24	8.93	39.34	265	56.00	-30.52	horizontal Average
6	1840.00	52.47	27.24	8.93	39.34	265	76.00	-26.70	horizontal Peak
7	2060.00	30.85	28.03	9.48	39.41	179	56.00	-27.05	horizontal Average
8 pp	2060.00	59.64	28.03	9.48	39.41	179	76.00	-18.26	horizontal Peak
9	2290.00	32.18	28.59	10.04	39.42	82	56.00	-24.61	horizontal Average
10	2290.00	53.02	28.59	10.04	39.42	82	76.00	-23.77	horizontal Peak
11	2800.00	34.87	29.84	11.23	39.88	213	56.00	-19.94	horizontal Average
12	2800.00	45.39	29.84	11.23	39.88	213	76.00	-29.42	horizontal Peak

◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level[dBuV]} + \text{Ant Factor[dB/m]} + \text{Cable Loss [dB]} - \text{Preamp Factor [dB]}) - \text{Limit Line[dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

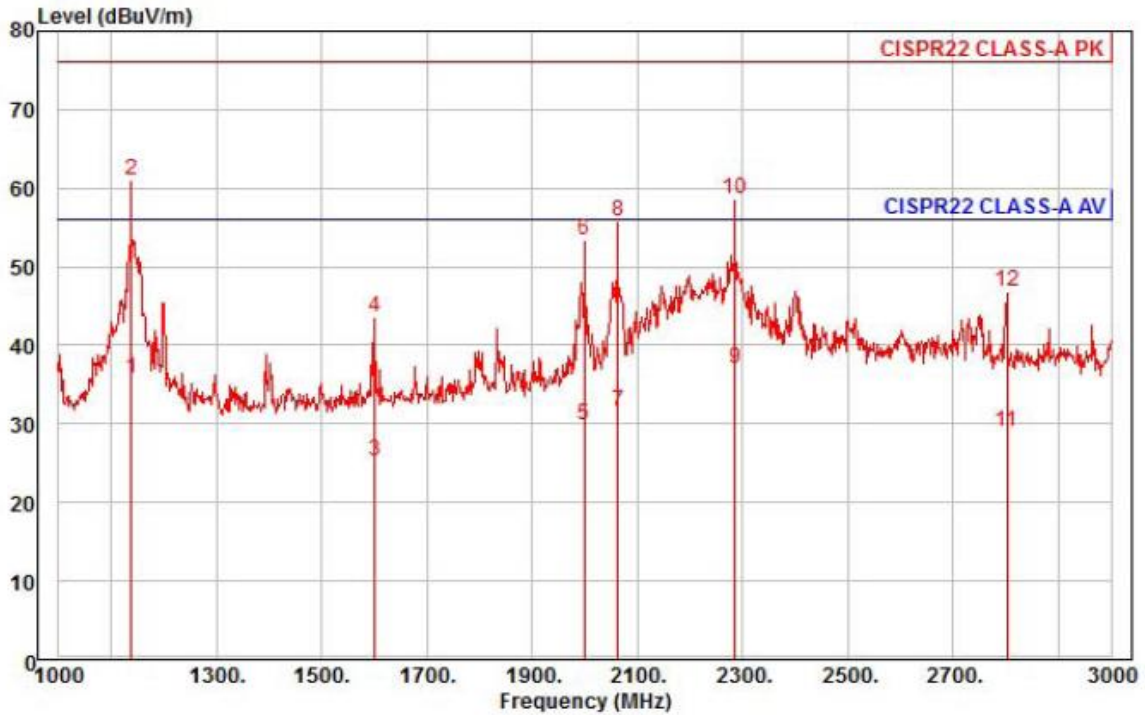

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNB-8000P  
 Mode : DC  
 Memo : 1 ~ 3 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor	deg	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1138.00	24.46	6.93	39.76	227	56.00	-20.26	vertical	Average
2 pp	1138.00	24.46	6.93	39.76	227	76.00	-14.89	vertical	Peak
3	1600.00	26.29	8.31	39.22	205	56.00	-30.76	vertical	Average
4	1600.00	26.29	8.31	39.22	205	76.00	-32.37	vertical	Peak
5	2000.00	27.88	9.34	39.41	184	56.00	-26.04	vertical	Average
6	2000.00	27.88	9.34	39.41	184	76.00	-22.60	vertical	Peak
7	2064.00	28.04	9.48	39.41	343	56.00	-24.35	vertical	Average
8	2064.00	28.04	9.48	39.41	343	76.00	-20.22	vertical	Peak
9 av	2286.00	28.58	10.03	39.42	343	56.00	-18.90	vertical	Average
10	2286.00	28.58	10.03	39.42	343	76.00	-17.35	vertical	Peak
11	2802.00	29.84	11.24	39.88	7	56.00	-26.93	vertical	Average
12	2802.00	29.84	11.24	39.88	7	76.00	-29.20	vertical	Peak

◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level[ dBuV]} + \text{Ant Factor[ dB/m]} + \text{Cable Loss [dB]} - \text{Preamp Factor [dB]}) - \text{Limit Line[ dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

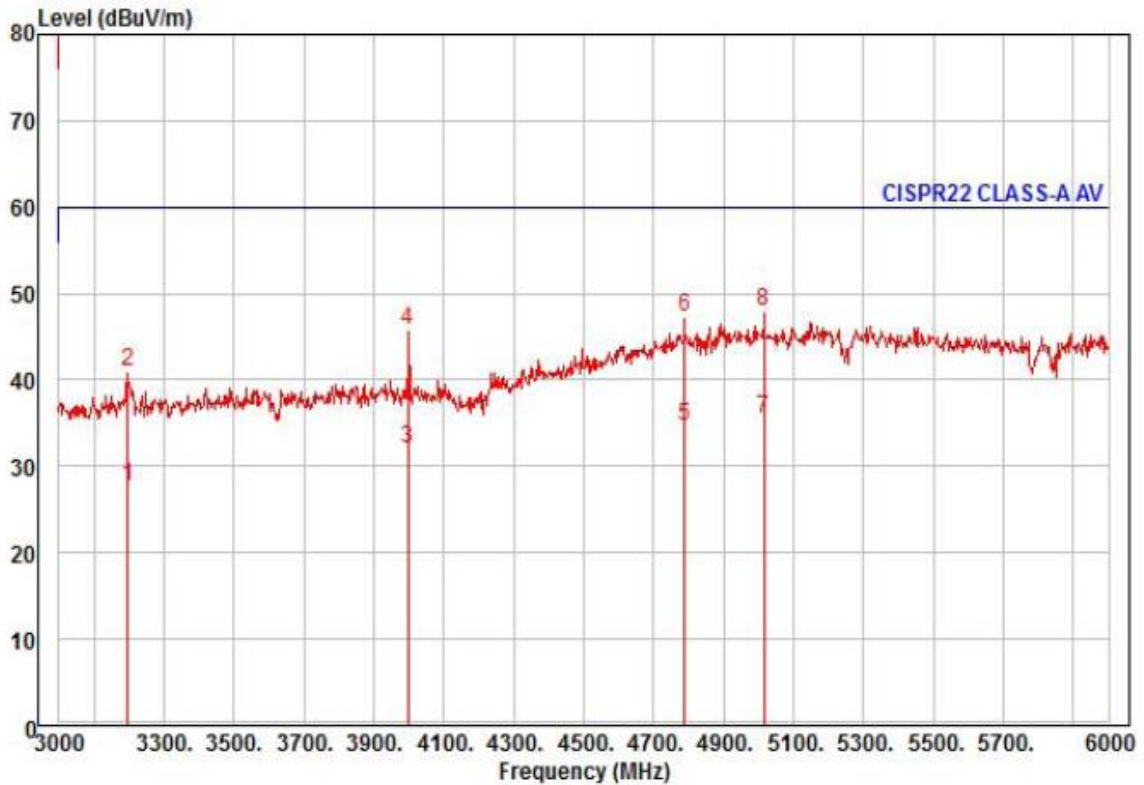

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNB-8000P  
Mode : DC  
Memo : 3 ~ 6 GHz


	Read Freq	Ant Level	Ant Factor	Cable Loss	Preamp Factor	TPos deg	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3198.00	25.32	30.66	12.05	40.41	45	60.00	-32.38	horizontal	Average
2	3198.00	38.70	30.66	12.05	40.41	45	80.00	-39.00	horizontal	Peak
3	3999.00	27.27	32.01	13.56	40.70	37	60.00	-27.86	horizontal	Average
4	3999.00	40.86	32.01	13.56	40.70	37	80.00	-34.27	horizontal	Peak
5	4788.00	23.60	36.51	15.07	40.48	126	60.00	-25.30	horizontal	Average
6	4788.00	36.12	36.51	15.07	40.48	126	80.00	-32.78	horizontal	Peak
7 pp	5016.00	22.69	37.69	15.35	40.30	171	60.00	-24.57	horizontal	Average
8 pk	5016.00	35.29	37.69	15.35	40.30	171	80.00	-31.97	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

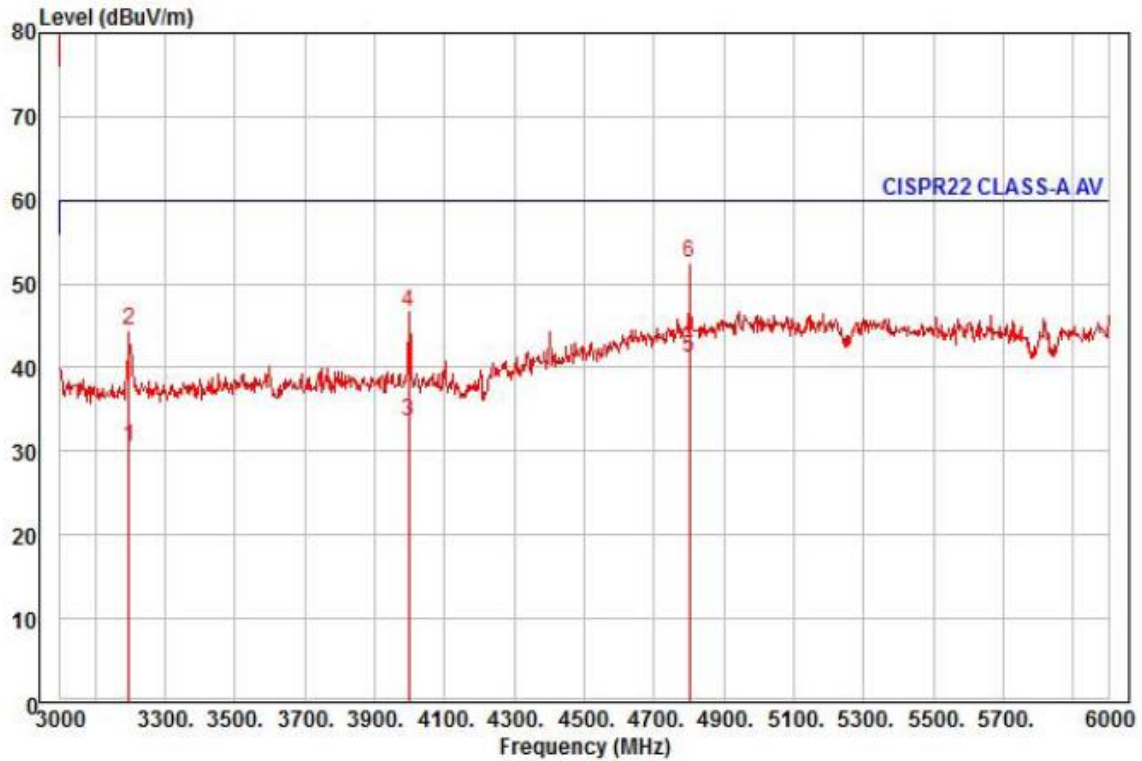

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNB-8000P  
 Mode : DC  
 Memo : 3 ~ 6 GHz

	Read Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3198.00	28.29	30.66	12.05	40.41	23	60.00	-29.41	vertical	Average
2	3198.00	42.20	30.66	12.05	40.41	23	80.00	-35.50	vertical	Peak
3	3999.00	28.62	32.01	13.56	40.70	34	60.00	-26.51	vertical	Average
4	3999.00	41.81	32.01	13.56	40.70	34	80.00	-33.32	vertical	Peak
5 pp	4800.00	30.03	36.58	15.10	40.47	268	60.00	-18.76	vertical	Average
6 pk	4800.00	41.38	36.58	15.10	40.47	268	80.00	-27.41	vertical	Peak


◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level[ dBuV]} + \text{Ant Factor[ dB/m]} + \text{Cable Loss [ dB]} - \text{Preamp Factor [ dB]}) - \text{Limit Line[ dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

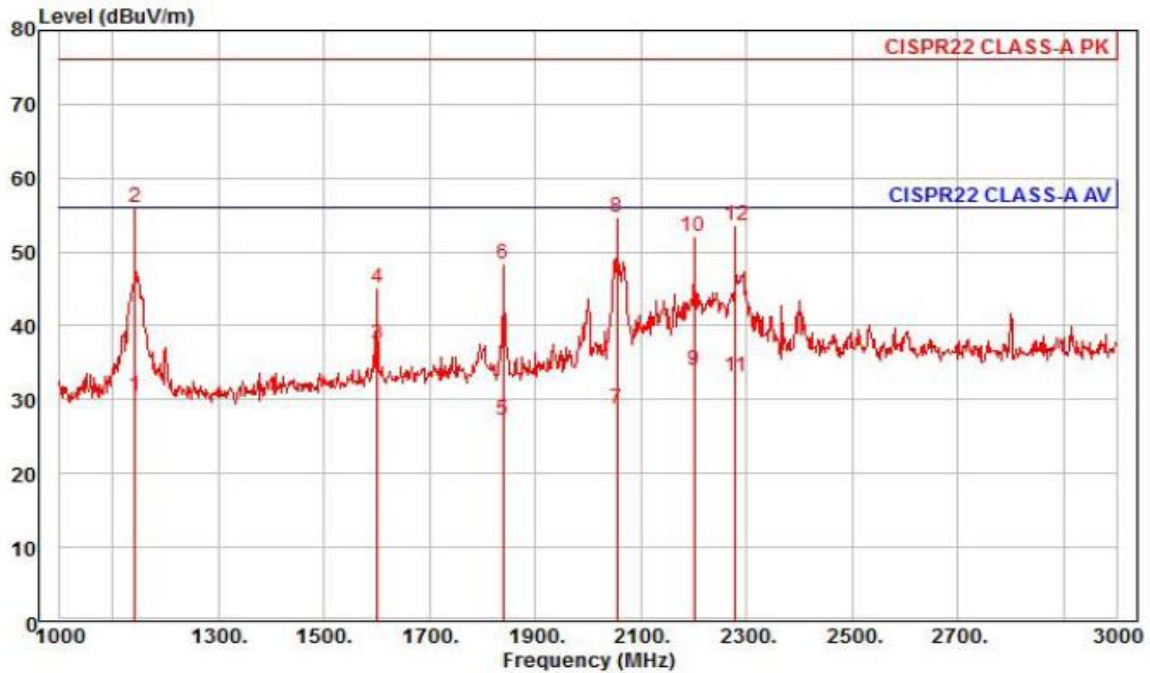

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNB-8000P  
 Mode : POE  
 Memo : 1 ~ 3 GHz


	Read Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1142.00	38.78	24.47	6.95	39.75	230	56.00	-25.55	horizontal	Average
2	1142.00	64.42	24.47	6.95	39.75	230	76.00	-19.91	horizontal	Peak
3	1600.00	42.14	26.29	8.31	39.22	45	56.00	-18.48	horizontal	Average
4	1600.00	49.70	26.29	8.31	39.22	45	76.00	-30.92	horizontal	Peak
5	1840.00	30.39	27.24	8.93	39.34	30	56.00	-28.78	horizontal	Average
6	1840.00	51.62	27.24	8.93	39.34	30	76.00	-27.55	horizontal	Peak
7	2054.00	30.70	28.01	9.46	39.41	339	56.00	-27.24	horizontal	Average
8	2054.00	56.71	28.01	9.46	39.41	339	76.00	-21.23	horizontal	Peak
9	2200.00	35.15	28.37	9.80	39.42	173	56.00	-22.10	horizontal	Average
10	2200.00	53.38	28.37	9.80	39.42	173	76.00	-23.87	horizontal	Peak
11	2280.00	33.95	28.57	10.01	39.42	333	56.00	-22.89	horizontal	Average
12	2280.00	54.53	28.57	10.01	39.42	333	76.00	-22.31	horizontal	Peak

◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level [dBuV]} + \text{Ant Factor [dB/m]} + \text{Cable Loss [dB]} - \text{Preamp Factor [dB]}) - \text{Limit Line [dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

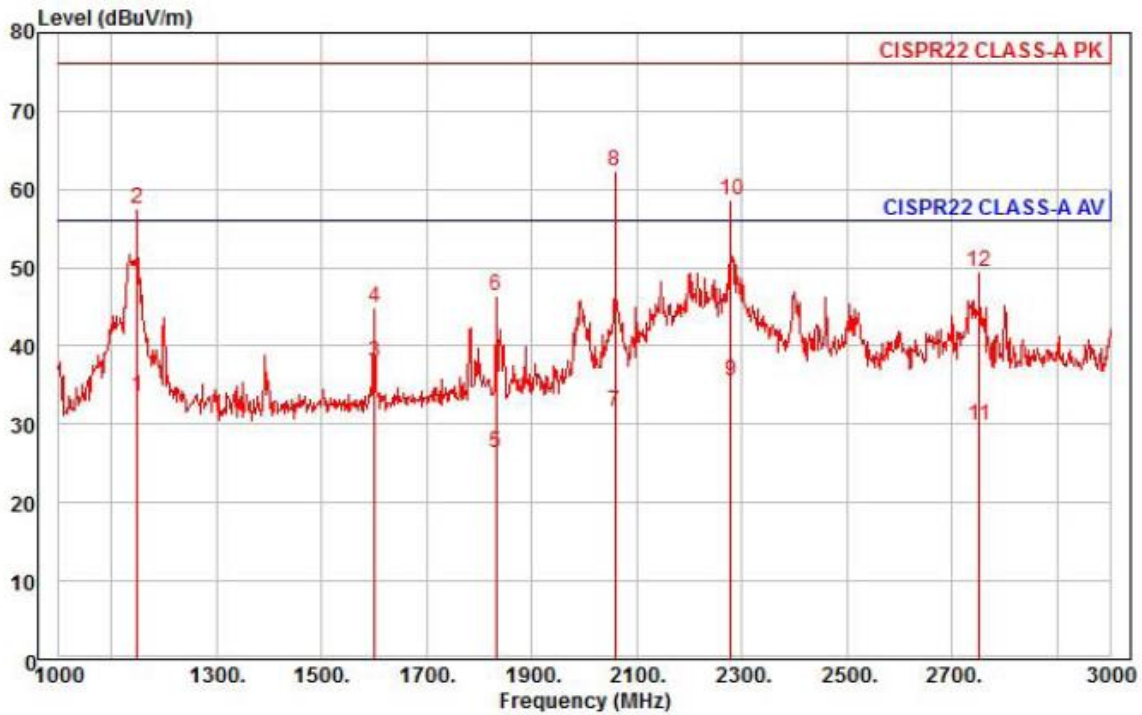

Site : chamber  
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNB-8000P  
Mode : POE  
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1148.00	41.74	24.50	6.97	39.73	176	56.00	-22.52	vertical	Average
2	1148.00	65.82	24.50	6.97	39.73	176	76.00	-18.44	vertical	Peak
3 av	1600.00	42.63	26.29	8.31	39.22	344	56.00	-17.99	vertical	Average
4	1600.00	49.57	26.29	8.31	39.22	344	76.00	-31.05	vertical	Peak
5	1832.00	29.54	27.21	8.91	39.33	226	56.00	-29.67	vertical	Average
6	1832.00	49.58	27.21	8.91	39.33	226	76.00	-29.63	vertical	Peak
7	2058.00	33.61	28.02	9.47	39.41	350	56.00	-24.31	vertical	Average
8 pp	2058.00	64.22	28.02	9.47	39.41	350	76.00	-13.70	vertical	Peak
9	2280.00	36.43	28.57	10.01	39.42	330	56.00	-20.41	vertical	Average
10	2280.00	59.50	28.57	10.01	39.42	330	76.00	-17.34	vertical	Peak
11	2752.00	28.92	29.72	11.11	39.82	356	56.00	-26.07	vertical	Average
12	2752.00	48.48	29.72	11.11	39.82	356	76.00	-26.51	vertical	Peak


◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level [dBuV]} + \text{Ant Factor [dB/m]} + \text{Cable Loss [dB]} - \text{Preamp Factor [dB]}) - \text{Limit Line [dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



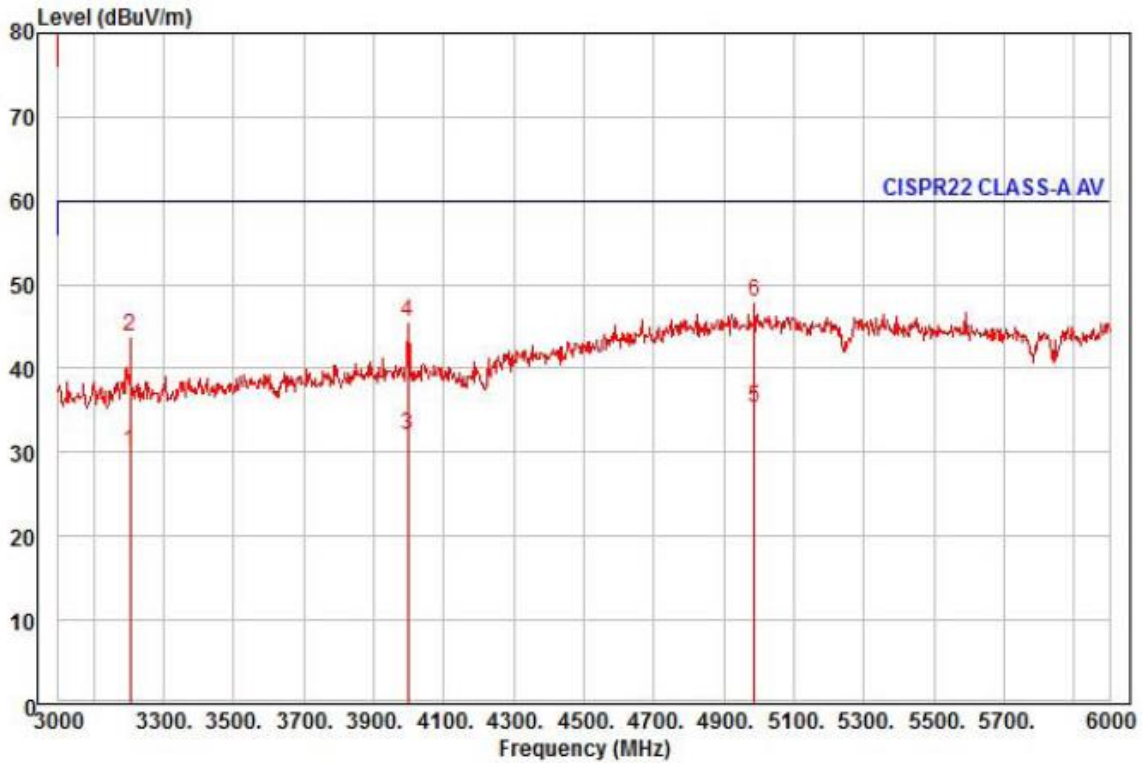

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNB-8000P  
 Mode : POE  
 Memo : 3 ~ 6 GHz


	Read Freq	Ant Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3204.00	27.74	30.67	12.07	40.42	41	60.00	-29.94	horizontal	Average
2	3204.00	41.59	30.67	12.07	40.42	41	80.00	-36.09	horizontal	Peak
3	3999.00	27.15	32.01	13.56	40.70	38	60.00	-27.98	horizontal	Average
4	3999.00	40.59	32.01	13.56	40.70	38	80.00	-34.54	horizontal	Peak
5 pp	4986.00	22.55	37.64	15.30	40.28	32	60.00	-24.79	horizontal	Average
6 pk	4986.00	35.23	37.64	15.30	40.28	32	80.00	-32.11	horizontal	Peak

◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level [dBuV]} + \text{Ant Factor [dB/m]} + \text{Cable Loss [dB]} - \text{Preamp Factor [dB]}) - \text{Limit Line [dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

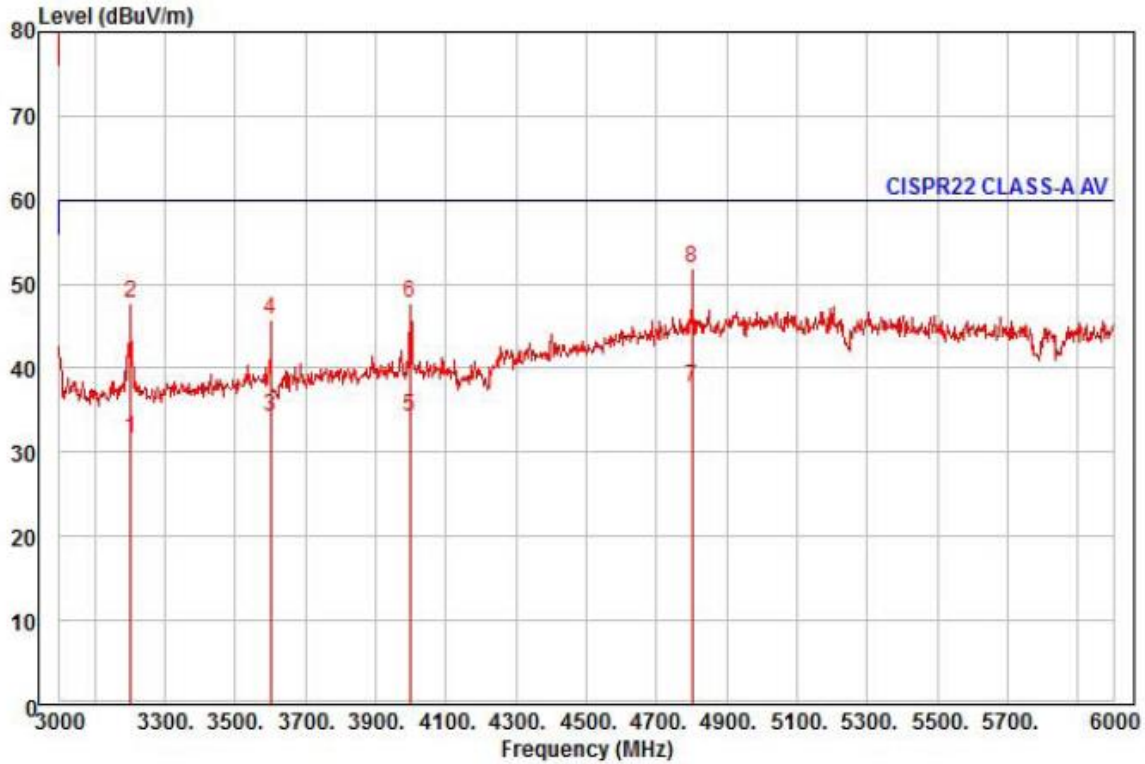

Site : chamber  
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical  
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
 Project :  
 Model : XNB-8000P  
 Mode : POE  
 Memo : 3 ~ 6 GHz

	Read Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3201.00	29.23	30.67	12.06	40.42	320	60.00	-28.46	vertical	Average
2	3201.00	45.36	30.67	12.06	40.42	320	80.00	-32.33	vertical	Peak
3	3600.00	30.93	31.34	12.81	40.84	23	60.00	-25.76	vertical	Average
4	3600.00	42.41	31.34	12.81	40.84	23	80.00	-34.28	vertical	Peak
5	3999.00	29.39	32.01	13.56	40.70	29	60.00	-25.74	vertical	Average
6	3999.00	42.89	32.01	13.56	40.70	29	80.00	-32.24	vertical	Peak
7 pp	4800.00	26.49	36.58	15.10	40.47	357	60.00	-22.30	vertical	Average
8 pk	4800.00	40.70	36.58	15.10	40.47	357	80.00	-28.09	vertical	Peak

◆ Calculation

$$\text{Over Limit [dB]} = (\text{Read Level [dBuV]} + \text{Ant Factor [dB/m]} + \text{Cable Loss [dB]} - \text{Preamp Factor [dB]}) - \text{Limit Line [dBuV]}$$

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,  
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.







Test Data - Voltage Fluctuations

**Maximum Flicker results**


	<b>EUT values</b>	<b>Limit</b>	<b>Result</b>
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Test Setup Photos and Configuration

### Conducted Voltage Emissions

- AC Mode

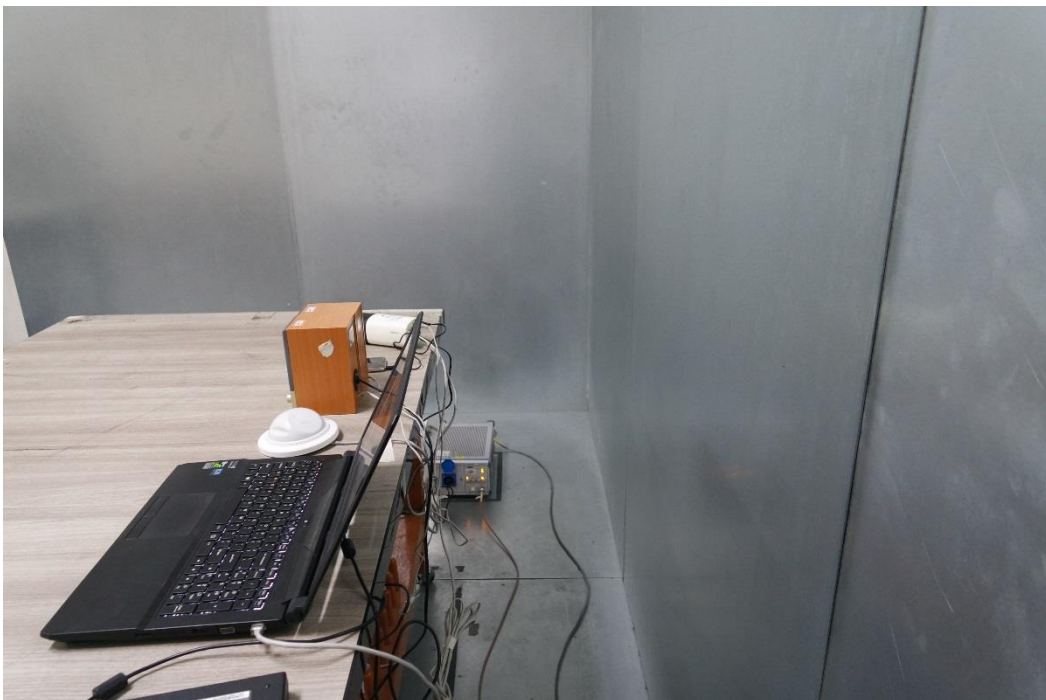

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


## Conducted Telecommunication Emissions

- AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC Mode

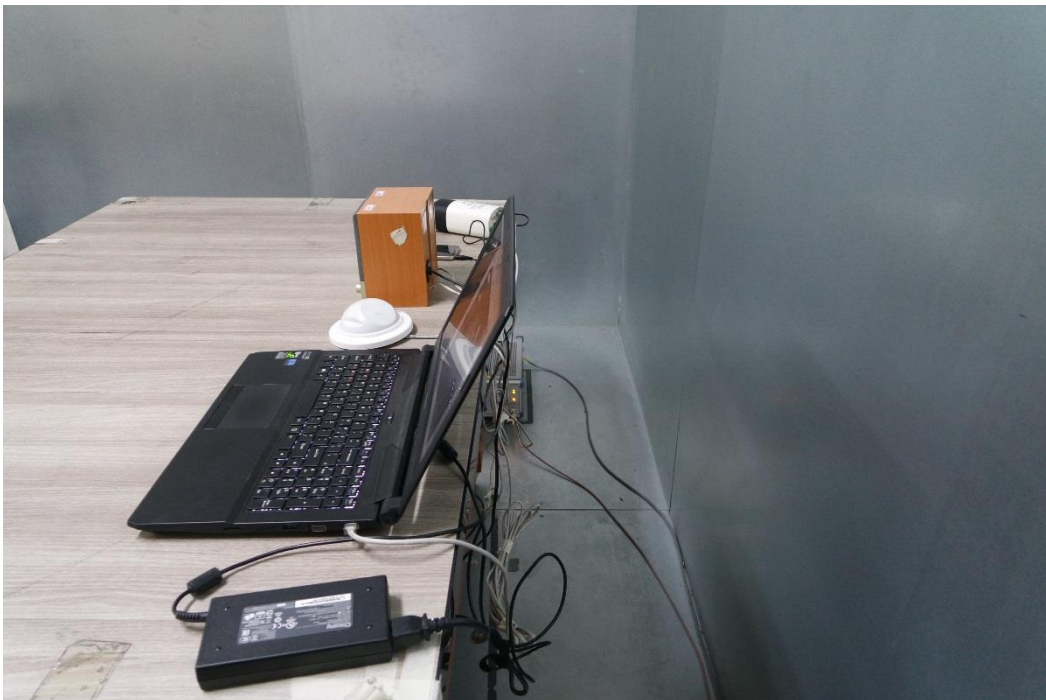

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



- POE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Radiated Electric Field Emissions(Below 1 GHz)

- AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Radiated Electric Field Emissions(Above 1 GHz)

- AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-16T0608-R1  
Page (80) of (98)

---

## **Harmonic Current Emissions and Voltage Fluctuations and Flicker**

N/A

## **Electrostatic Discharge**

N/A


---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




## Radiated Electric Field Immunity

- AC Mode

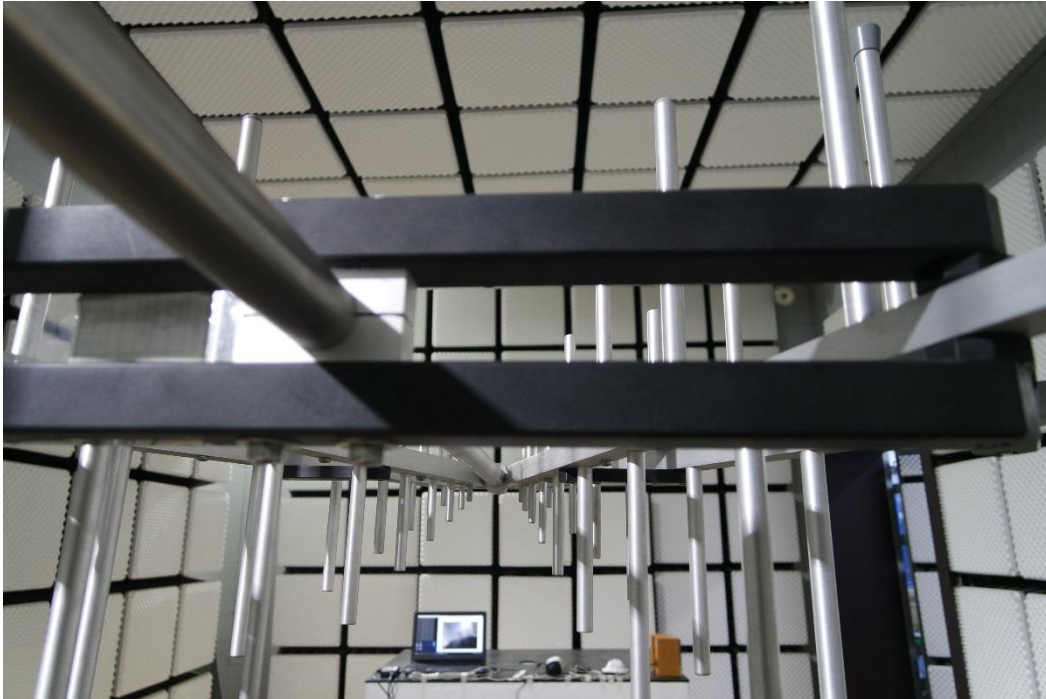

- DC Mode

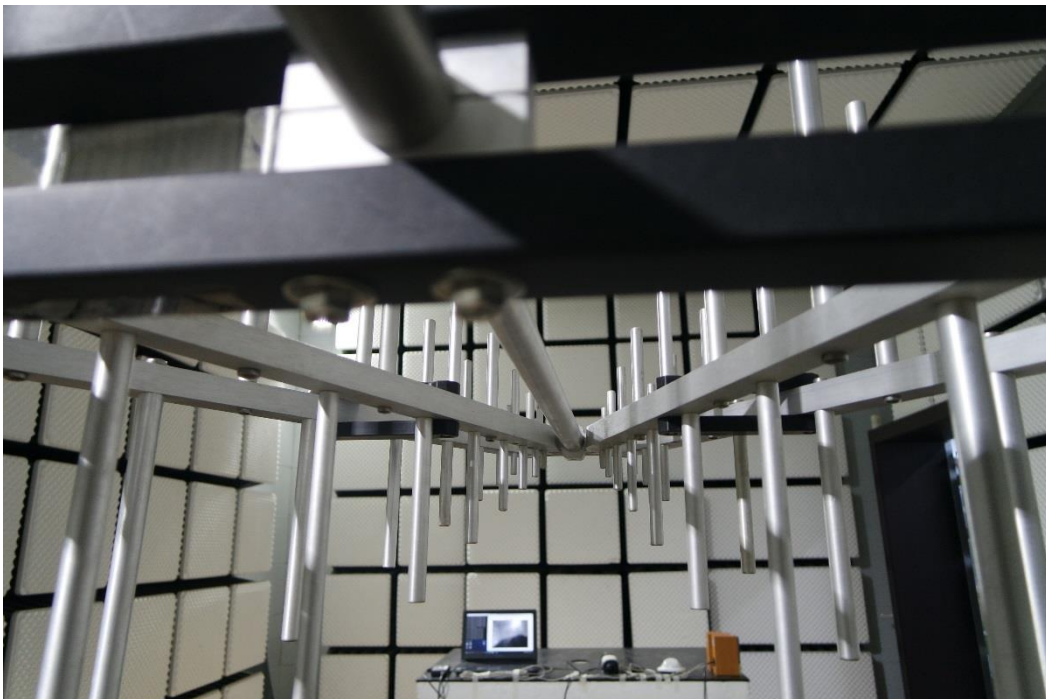

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Electrical Fast Transients/Bursts

- AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

N/A



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Surge Transients

- AC Mode



N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- DC Mode



N/A

- POE Mode



N/A



## Conducted Disturbance

- AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


- DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

N/A

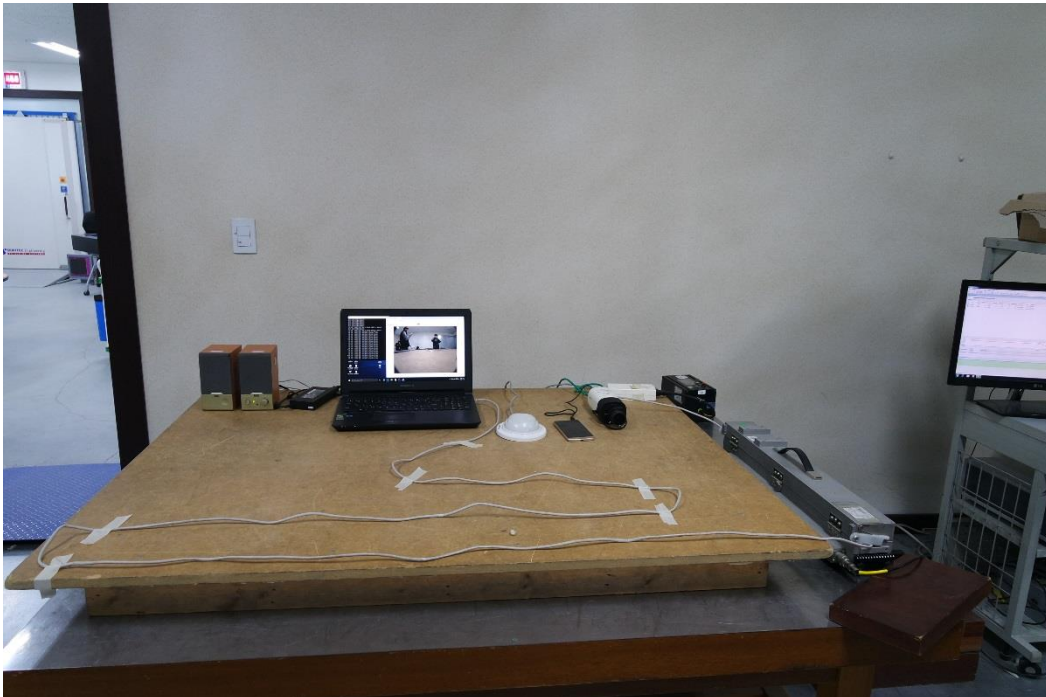

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Voltage Dips and Short Interruptions

- AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal View – Main board

(Top)

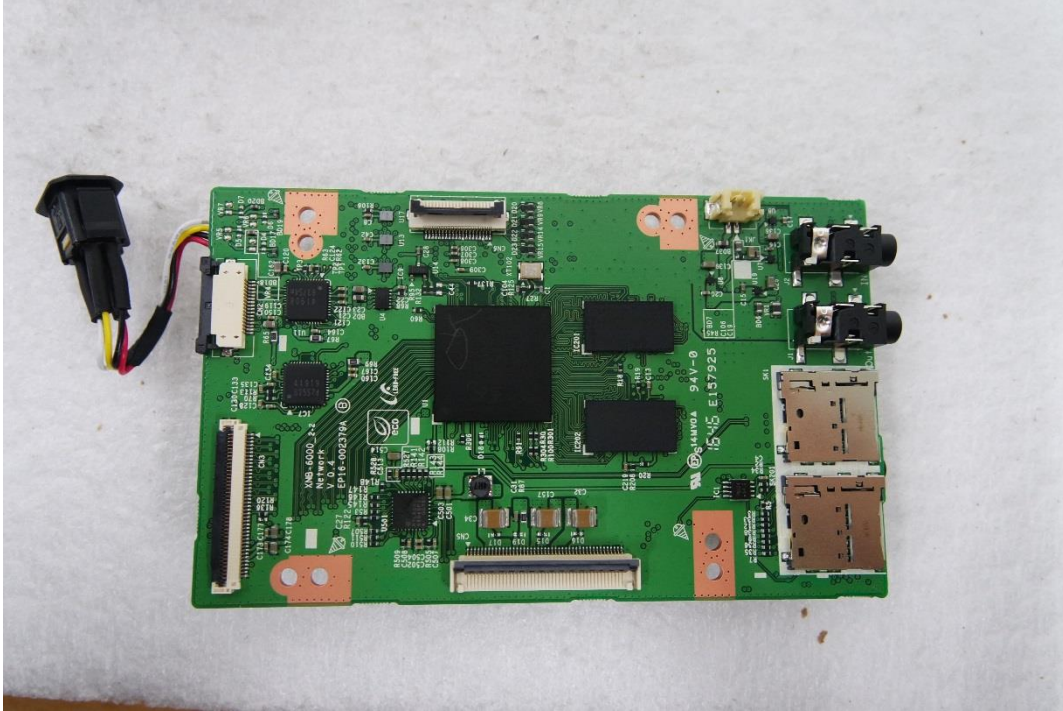


(Bottom)

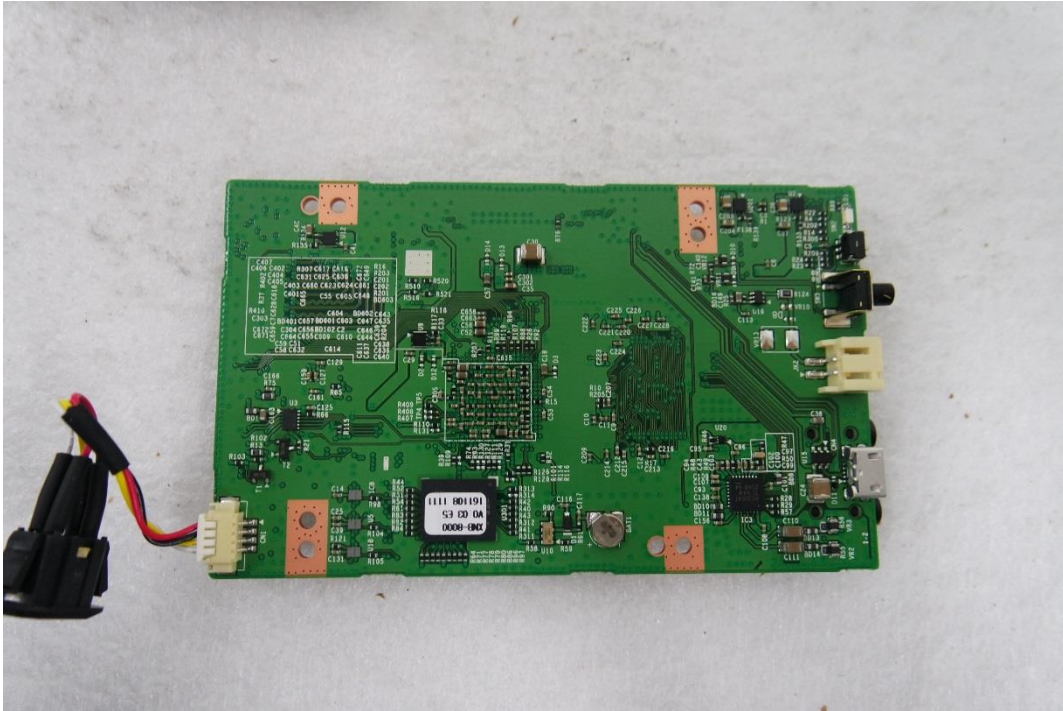


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal View – Power Board

(Top)

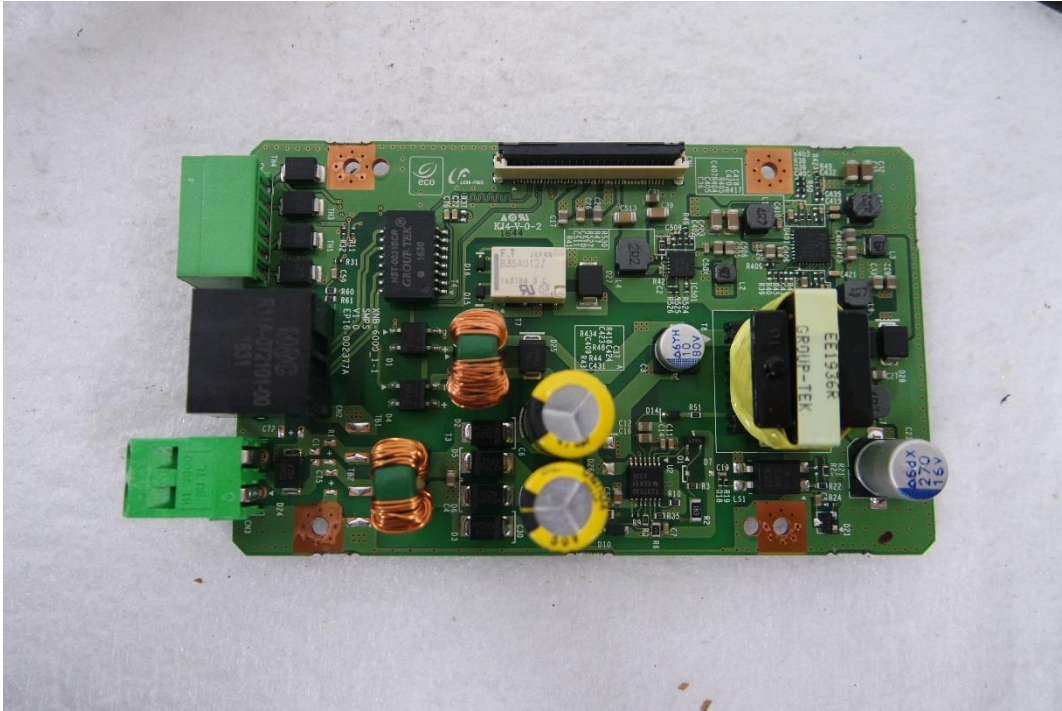

(Bottom)

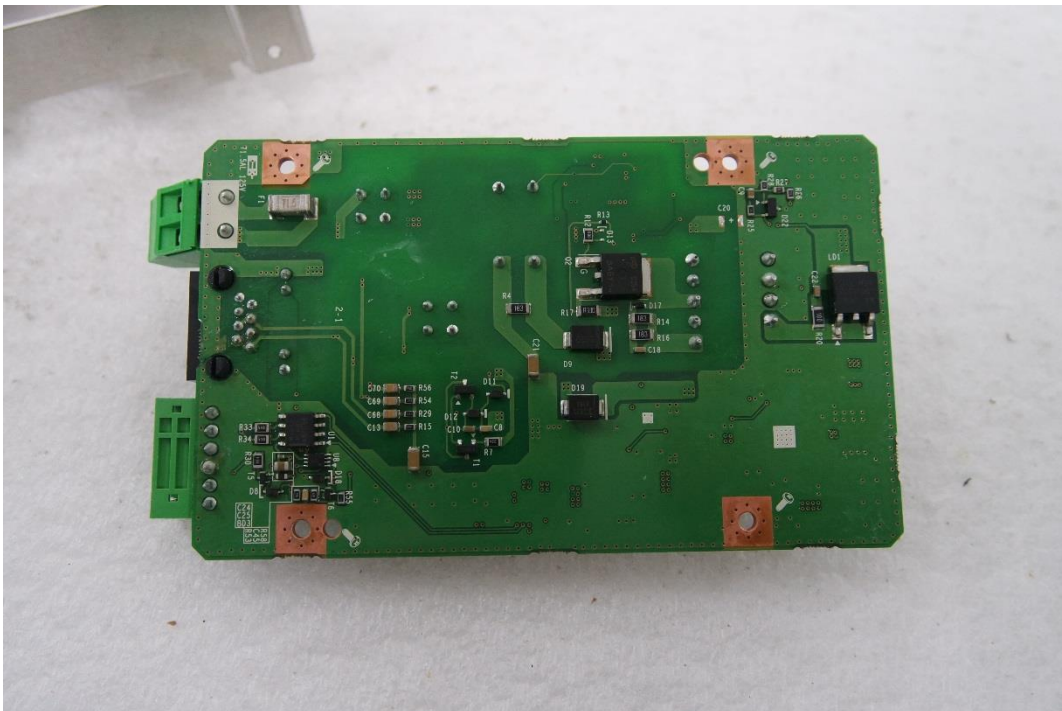

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




## EUT Internal View - Lens

(Top)




(Bottom)

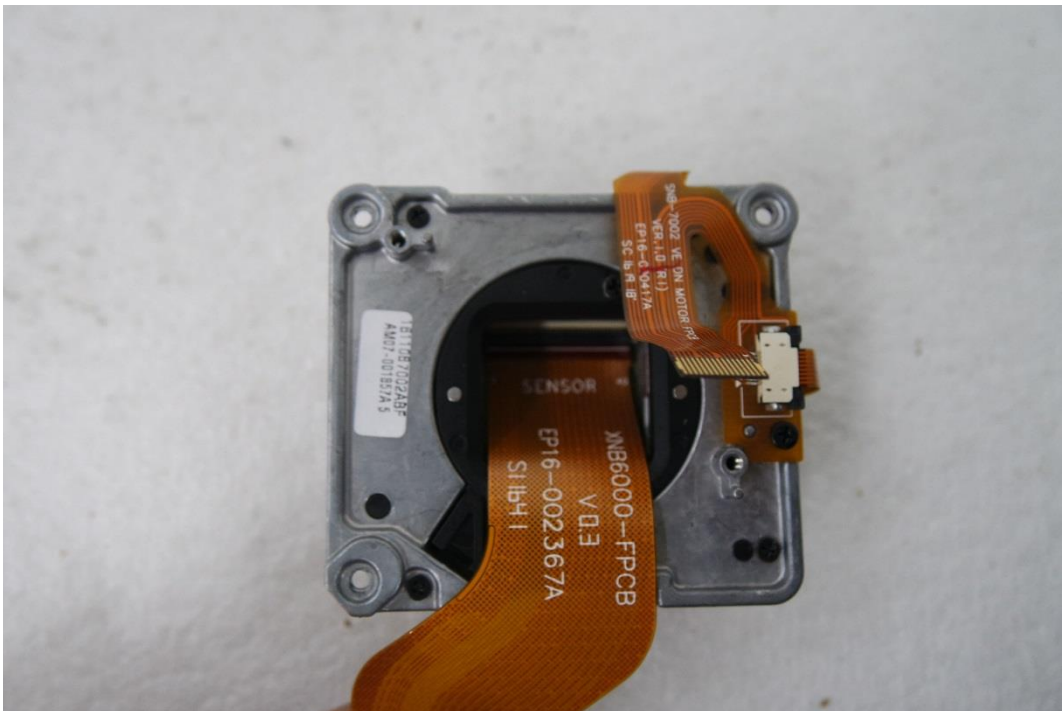

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Label and Location

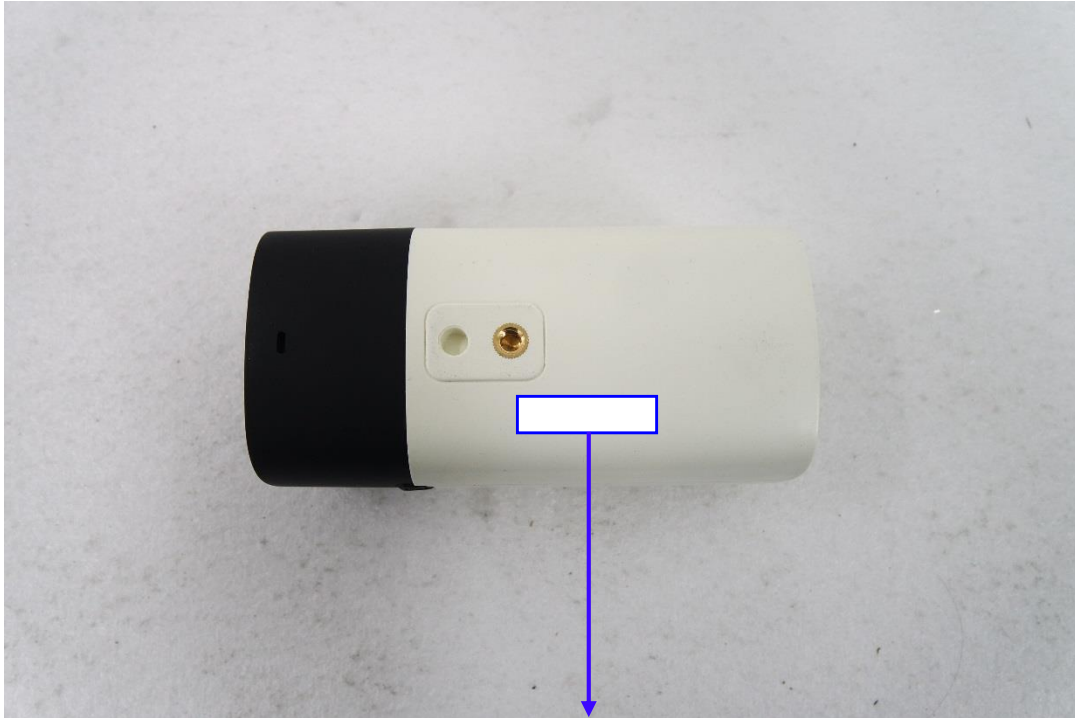

### **NETWORK CAMERA**

Model No : XNB-8000P

Manufacturer : Hanwha Techwin(Tianjin) Co., Ltd.

Made in China

