


NX-408-I/NX-416-I/NX-448-I : wireless receivers

- add wireless capabilities to NetworX panels
- compatible with all NX wireless transmitters
- 433.92 MHz
- up to 8 (NX-4), 16 (NX-6) or 192 (NX-8E) supervised wireless zones
- mixture of hardwired and wireless zones possible
- keypad annunciation of alarm, tamper, low battery and lost transmitter
- optional tamper switch
- optional jam detection
- optional antenna tamper detection
- choice between 3 models:
 - NX-408-I : 8 transmitters
 - NX-416-I : 16 transmitters
 - NX-448-I : 48 transmitters



NX-408-I / NX-416-I / NX-448-I

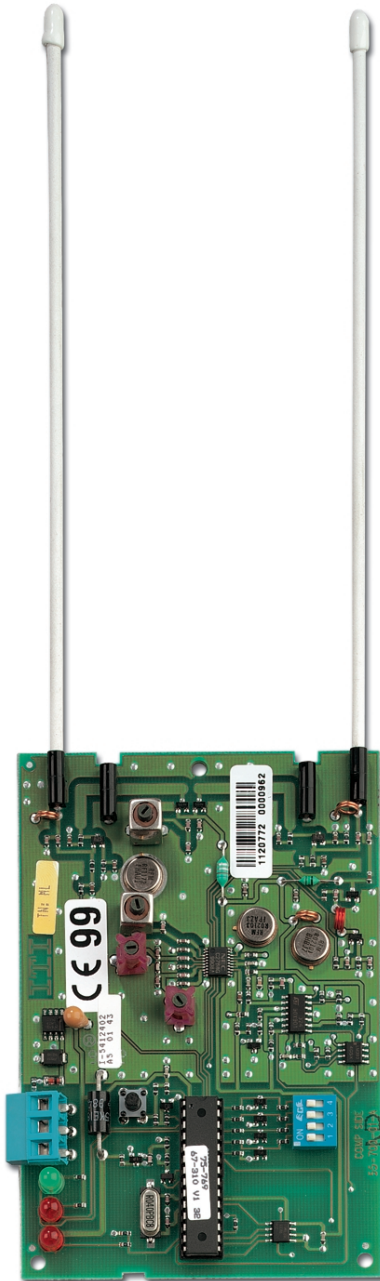

NX-469

These wireless receivers allow the integration of the most advanced wireless technology with the NetworX panels. Depending on the control panel that is used, up to 8, 16, 48 or 192 transmitters can be individually displayed at the keypad for alarm and all supervisory reports.

Due to its modular design, the receivers can be mounted in the control panel enclosure or they can be installed remotely in a separate receiver enclosure NX-469.

Technical specifications:

Operating power (nominal)	12 Vdc via NetworX bus
Power consumption	max. 20 mA
Frequency	433,92 MHz
Operating temperature	0° to 50°C
Dimensions PC board	120 x 81 mm (excluding antennas)
Weight	0.068 kg

ordering code	part number	product description
NXW001	NX-408-I	8 zone wireless receiver, 433.92 MHz
NXW002	NX-416-I	16 zone wireless receiver, 433.92 MHz
NXW003	NX-448-I	48 zone wireless receiver, 433.92 MHz
NXW004	NX-469	Wireless receiver enclosure