

ZW-7000


ZeroWire 3G radio module with UTC SIM card

Comunicación

Este módulo puede servir como conexión primaria o secundaria y ofrece un canal de comunicación 3G seguro a cualquier central receptora conectada a la solución de la nube UTC. El módulo 3G de Zerowire ofrece un canal seguro para cargar y descargar a la vez que un interfaz móvil para la conectividad APP.

Seguro y Rápido

El módulo 3G para Zerowire utiliza una tarjeta SIM con roaming inteligente para una transmisión rápida y segura de un mensaje de alarma, la SIM buscará las tres redes con mejor cobertura para ayudar a asegurar que se alcanza la mejor conexión móvil posible.

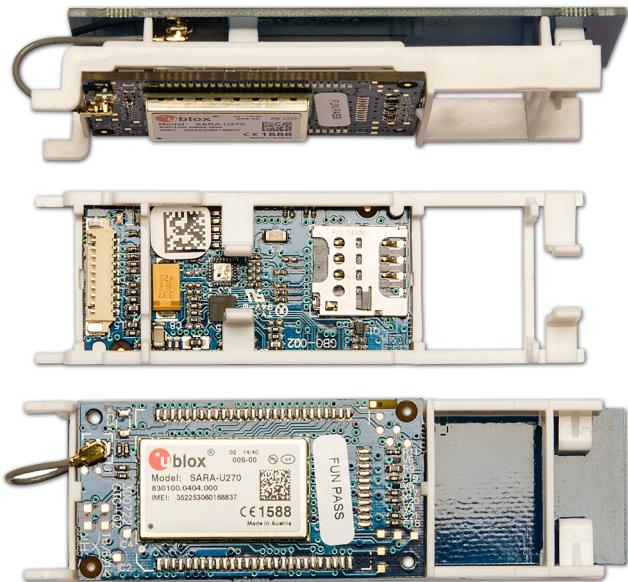

Details

- Módulo de comunicación 3G para ZeroWire
- Tarjeta SIM con roaming inteligente incluida
- Para conexión primaria y/o secundaria
- Conexión automática al cloud UltraSync
- Antena externa incluida
- EN50131-10 / EN50131-6 Grado 2 Class II
- Fácil de instalar

ZW-7000

ZeroWire 3G radio module with UTC SIM card

Technical specifications

General

Grupo de accesorios	ZeroWire
Tipo	Módulo
	The ZW-7000 module adds 3G mobile connectivity to the ZeroWire alarm panel, allowing alarm reporting and remote connection over the 3G mobile network via UTC's UltraSync cloud solution. A SIM card is pre-installed and should not be removed.

Medioambiental

Temperatura de funcionamiento	-10 to 50
Temperatura de almacenamiento	-34 to 60
Humedad relativa	85% relative humidity non-condensing
Entorno	Interior

Estándares y regulaciones

Cumplimiento	CE
Certificación	EN50131 Grado 2

Installation

The ZW-7000 plug-on module can be installed on any ZeroWire panel. The network details and signal strength can be verified locally from the ZeroWire webpage, via the UltraSync+ mobile application or via the UltraSync webportal.

Connectivity

The ZW-7000 does not require any programming. Once powered, it will automatically connect to the UltraSync cloud server from where several features can be set such as alarm reporting to a central monitoring station as primary or back up path. The ZeroWire system can also send email messages via the 3G module and if the web access is set, it allows both the end user as well as the installer to remotely control and program the ZeroWire panel via the ZW-7000 3G module. An App allows the user to use an Apple iPhone/Ipad or Google Android device to arm/disarm partitions, enable or disable Chime, bypass zones and manage users. The same App allows the installer to perform basic and advanced system programming. The UltraSync cloud server will also allow the DLX900 download computer to make a secure connection to the ZeroWire panel via the 3G mobile network without the need to know the system's IP address or IP port settings. It only required to enter the unique serial number and web access code in the DLX900 downloader.

Secure and Fast

The ZeroWire 3G radio module uses a multi network SIM card for fast and secure transmission of an alarm message, the multi network SIM will roam up to 3 networks depending on the coverage, to help ensure the best cellular performance is achieved.