

iDS-7208HUHI-M2/X 8-ch 5 MP 1U H.265 AcuSense DVR

Key Feature

- 8 channels and 2 HDD 1U AcuSense DVR
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Efficient H.265 pro+ compression technology
- Up to 8 MP @ 8 fps, 5 MP @ 12 fps encoding ability
- Up to 24 channels IP camera inputs, each channel up to 8MP
- Up to 24 *1080P@30 decoding ability
- Up to 8 channels (analog channel) Motion Detection 2.0
- Up to 8 channels (advanced model, analog channel) Perimeter Protection
- Up to 4 channels (advanced model, analog channel) human face recognition



Compression and Recording

- H.265 Pro+ can be enabled to improve encoding efficiency and reduce data storage costs
- Recording at up to 8 MP resolution

Smart Function

- Up to 8 channels (analog channel) Motion Detection 2.0
- Up to 8 channels (advanced model, analog channel) Perimeter Protection
- Up to 4 channels (advanced model, analog channel) human face recognition
- Support smart playback to enhance playback efficiency

Network & Ethernet Access

- Support Hik-Connect & DDNS (Dynamic Domain Name System)
- Output bandwidth limit configurable


▪ Specification

| Facial Recognition | |
|------------------------------|--|
| Face Picture Library | Up to 16 face picture libraries; HDD damage will not cause data loss in the face picture library, because the library has been backed up by HDD and flash. |
| Face Picture Comparison | 4-ch face picture comparison alarm (HD analog camera) |
| Motion Detection 2.0 | |
| Human/Vehicle Analysis | Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights; Quick search by object or event type is supported; |
| Perimeter Protection | |
| Human/Vehicle Analysis | Up to 8-ch (advanced model) |
| Facial Detection | |
| Facial Detection and Capture | Face picture detection, face picture search; 4-ch face picture capture |
| Recording | |
| Video Compression | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 |
| Encoding Resolution | 8 MP/5 MP/3K/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF |
| Frame Rate | Main stream: 8 MP@8 fps/3K@12 fps/5 MP@12 fps/4 MP@15 fps/8 MP Lite@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N) |
| Video Bitrate | 32 Kbps to 10 Mbps |
| Dual-stream | Support |
| Stream Type | Video, Video & Audio |
| Audio Compression | G.711u |
| Audio Bitrate | 64 Kbps |
| Video and Audio | |
| IP Video Input | 8-ch (up to 16-ch), each up to 4 Mbps Support H.265+/H.265/H.264+/H.264 IP cameras |
| Analog Video Input | 8-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection |

| | |
|----------------------------|--|
| HDMI Output | 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz HDMI/VGA simultaneous output |
| VGA Output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz HDMI/VGA simultaneous output |
| CVBS Input | PAL/NTSC |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Synchronous Playback | 8-ch |
| HDTVI Input | 8 MP(3840 × 2160)@15 fps, 8 MP(3840 × 2160)@12 fps, 3K(2960 × 1665)@20 fps, 5 MP(2560 × 1944)@20 fps, 5 MP(2560 × 1944)@12 fps, 4 MP(2560 × 1440)@30 fps, 4 MP(2560 × 1440)@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps |
| AHD Input | 5 MP(2560 × 1944)@20 fps, 5 MP(2560 × 1944)@12 fps, 4 MP(2560 × 1440)@30 fps, 4 MP(2560 × 1440)@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps |
| HDCVI Input | 8 MP(3840 × 2160)@15 fps, 8 MP(3840 × 2160)@12 fps, 5M(2880 × 1620)@25 fps, 5 MP(2592 × 1944)@20 fps, 4 MP(2560 × 1440)@30 fps, 4 MP(2560 × 1440)@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ), 8-ch via coaxial cable |
| Two-Way Audio | 1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input) |
| Decoding | |
| Decoding Capability | up to 24-ch 1080P@30fps |
| Network | |
| Total Bandwidth | 256 Mbps |
| Network Protocol | TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, ISUP |
| Remote Connection | 64 |
| Network Interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Auxiliary Interface | |
| SATA | 2 SATA interface |
| Capacity | up to 12 TB capacity for each disk |


| | |
|-----------------------|--|
| Serial Interface | RS-485 (half-duplex) |
| USB Interface | Front panel: 1 × USB 2.0; Rear panel: 2 × USB 3.0 |
| Alarm In/Out | N/A (optional to support) |
| General | |
| Power Supply | 12 VDC, 3.3 A |
| Consumption | ≤ 40 W |
| Working Temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| Working Humidity | 10% to 90% |
| Dimension (W × D × H) | 385 × 315 × 52 mm (15.2 × 12.4 × 2.0 inch) |
| Weight | ≤ 1.78 kg (3.9 lb) |

Dimension

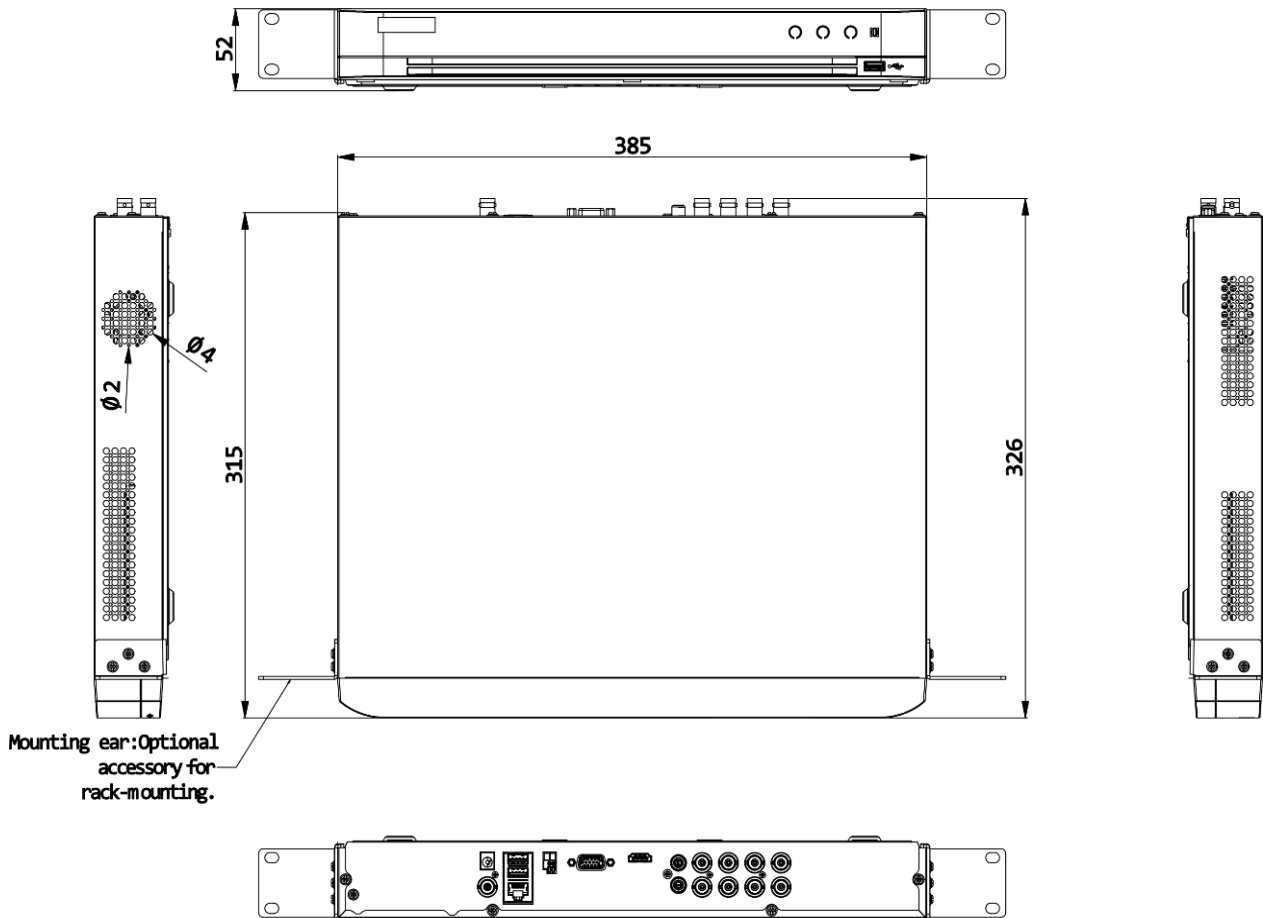

scale/1:1;Unit/mm

Physical Interface

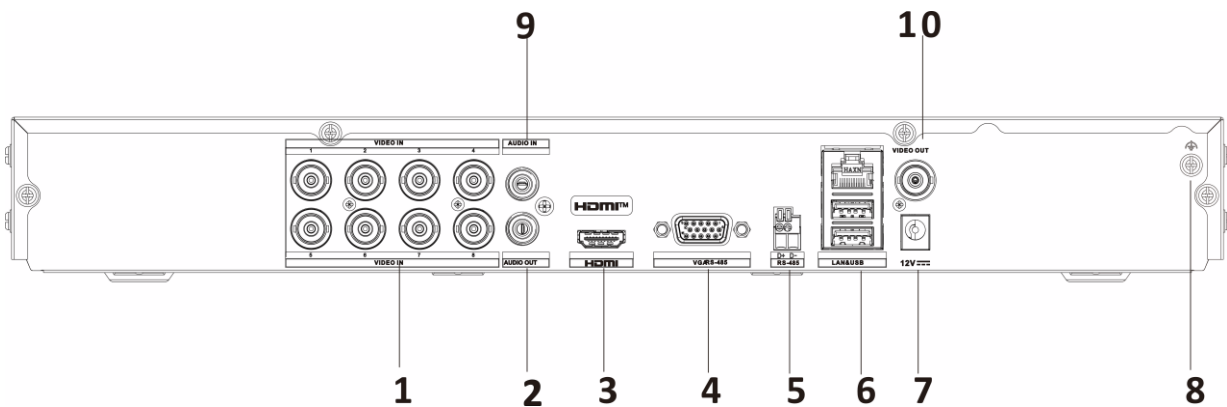

| No. | Description | No. | Description |
|-----|------------------|-----|---|
| 1 | Video in | 6 | LAN network interface and USB interface |
| 2 | Audio out | 7 | 12 VDC power input |
| 3 | HDMI interface | 8 | GND |
| 4 | VGA interface | 9 | Audio in |
| 5 | RS-485 interface | 10 | Video out |

Available Model

iDS-7208HUHI-M2/X

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq