

Specification

Nominal Voltage	12V	
Watts(15min Rate)	67.4 Watts at 1.67V/cell	
Dimension	Length	181.5±2mm (7.14 inches)
	Width	77±1mm (3.03 inches)
	Container Height	167.5±2mm (6.59inches)
	Total Height (with Terminal)	167.5±2mm (6.59inches)
Approx Weight	Approx 6.0 kg (13.2lbs)	
Terminal	T3	
Container Material	ABS	
Rated Capacity	18.7 AH/1.87A	(10hr, 1.80V/cell, 25°C/77°F)
	18.0 AH/2.25A	(8hr, 1.80V/cell, 25°C/77°F)
	17.1 AH/3.41A	(5hr, 1.75V/cell, 25°C/77°F)
	15.4 AH/5.14A	(3hr, 1.75V/cell, 25°C/77°F)
	13.0 AH/13.0A	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	270A (5s)	
Internal Resistance	Approx 15mΩ	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 5.4A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
	Standby Use No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	Leoch LPX series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Applications

- ◆ UPS (High rate)
- ◆ High power backup supply
- ◆ Emergency power supply
- ◆ Starting system
- ◆ Power tools
- ◆ Emergency lighting
- ◆ Electric starting



Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	55.0	36.5	30.1	25.2	19.0	14.0	11.3	6.47	4.71	3.78	3.18	2.73	2.16	1.80	1.00
1.80V/cell	60.4	40.1	32.6	27.2	20.0	14.8	11.7	6.80	5.00	3.99	3.32	2.87	2.25	1.87	1.01
1.75V/cell	65.2	43.6	34.6	28.7	20.9	15.3	12.1	7.01	5.14	4.08	3.41	2.94	2.30	1.89	1.02
1.70V/cell	68.8	46.1	36.4	30.0	21.7	15.8	12.5	7.22	5.27	4.17	3.49	2.99	2.34	1.92	1.03
1.67V/cell	72.5	48.2	37.6	30.9	22.4	16.3	12.9	7.38	5.33	4.23	3.53	3.05	2.37	1.95	1.04
1.60V/cell	77.1	50.1	38.7	31.5	22.7	16.4	13.0	7.50	5.41	4.29	3.58	3.08	2.39	1.96	1.05

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	102.6	68.3	56.5	47.5	36.2	26.9	21.8	12.6	9.17	7.40	6.23	5.36	4.26	3.55	1.98
1.80V/cell	109.2	73.5	60.4	50.9	37.8	28.1	22.4	13.1	9.68	7.77	6.49	5.62	4.46	3.70	2.00
1.75V/cell	116.8	79.1	63.4	53.2	39.2	29.0	23.1	13.5	9.92	7.91	6.63	5.73	4.52	3.73	2.02
1.70V/cell	121.6	82.4	66.0	55.2	40.4	29.8	23.9	13.8	10.1	8.06	6.77	5.83	4.59	3.79	2.04
1.67V/cell	126.2	85.0	67.4	56.3	41.5	30.4	24.4	14.1	10.2	8.15	6.83	5.93	4.64	3.83	2.05
1.60V/cell	131.8	87.0	68.2	56.4	41.4	30.5	24.5	14.3	10.3	8.24	6.91	5.96	4.66	3.85	2.07


Specifications subject to change without notice.




Dimensions

T3 Terminal


Unit: mm [inches]

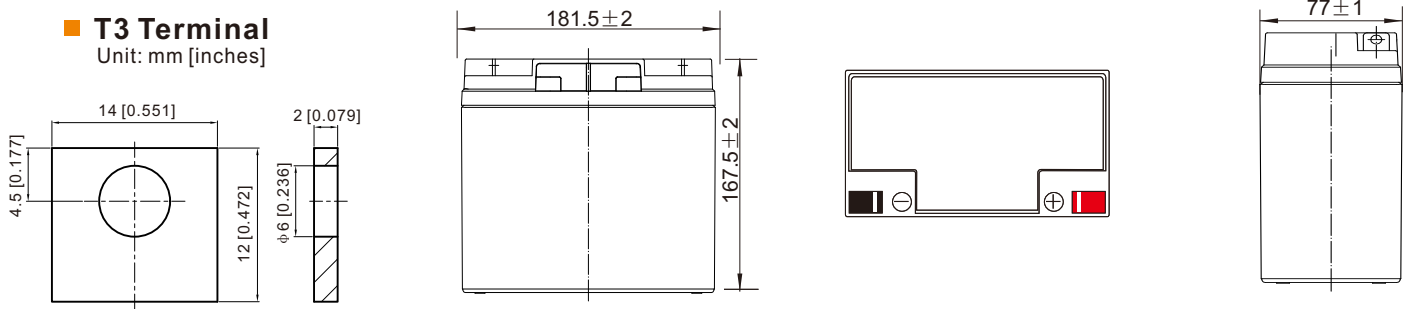


Discharge Characteristics

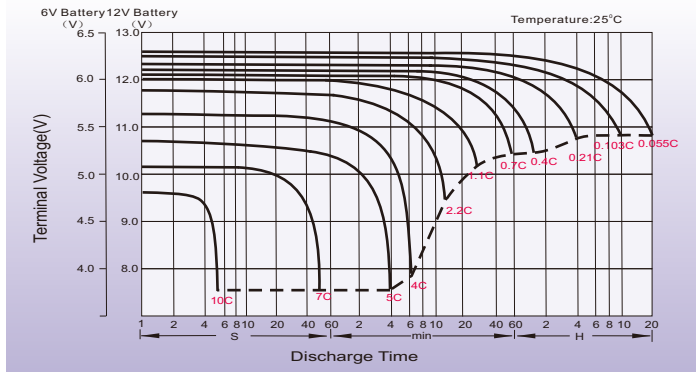



Float Charging Characteristics

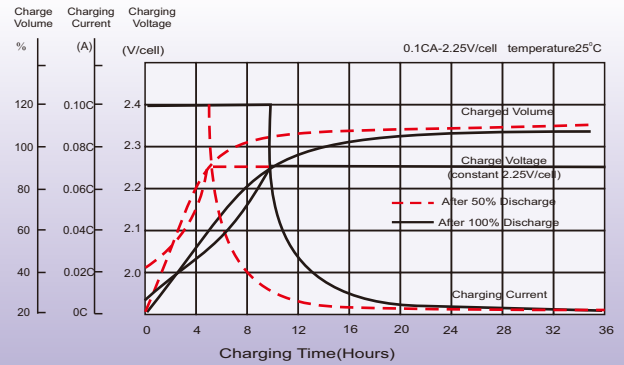

Temperature Effects in Relation to Battery Capacity

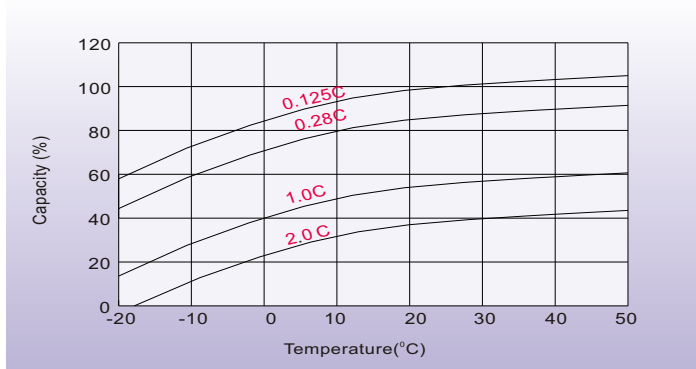

Effect of Temperature on Long Term Float Life

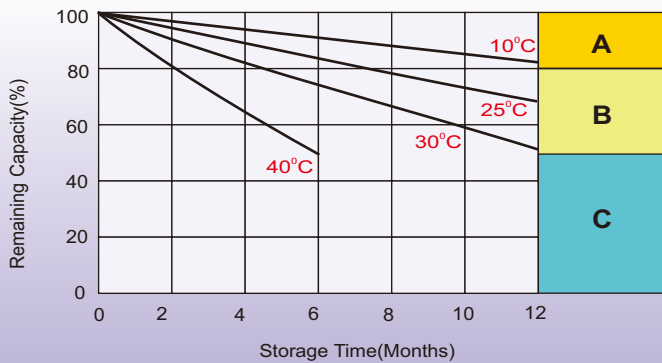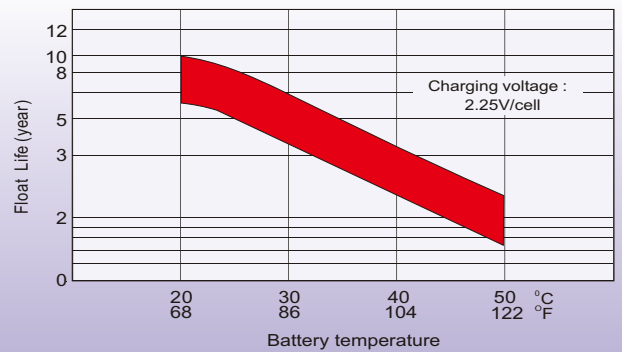

Self Discharge Characteristics

- A** No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8-10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

Sales Office

China sales office:

Add: 5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (100 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com
Http://www.leoch.com

HongKong sales office:

Workshop C, 33/F, TML Tower,
No. 3 Hoi Shing Road, Tsuen Wan,
New Territories, Hong Kong
Tel: +852 35786666
Fax: +852 21170016
E-mail: sales.hk@leoch.com

Singapore sales office:

Add: No. 1 Tech Park Crescent,
Singapore 638131
Tel: +65 68636078
Fax: +65 68636079
Email sales.sg@leoch.com
Http://www.leoch.com

North America sales office:

Add: 19751 Descartes, Unit A,
Foothill Ranch, CA 92610, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.us
Http://www.leoch.us

Europe sales office:

Add: 9B Wheatstone Court, Waterwells
Business Park, Gloucester, GL2-2AQ,
UK United Kingdom
Tel: +44(0) 1452 729428 / 1452 729696
Fax: +44 (0)1452-690125
E-mail: Sales.Europe@leoch.com