

# RF4012|4PI

**Detector de movimiento vía radio (433 Mhz) PIR 9 cortinas de 12m con inmunidad mascotas.**

## One way transmitter

---

The sensor has a chip tuned wireless transmitter that communicates with any 433-63 bit legacy receiver.

The learn-in process of the sensor is identical to the process used with legacy sensors.

Each sensor reports a unique ID code with each transmission.

The sensor also reports the battery and transmitter condition (supervisory signal) to the panel every 18 minutes.

## Mirror power

---

The patented optical mirror technology gives the advantage of gliding focus, which creates a volumetric detection curtain from floor level up to installation height resulting in a sensor that never loses track of the object.

The PI optical mirror is specially designed to ignore pets moving around on the floor without compromising detection performance for humans

In these series we are using a dual element digital pyro generating 2 volumetric curtains for each of the 9 curtain sets.

## 5D signal processing

---

The unique 5D signal processing technology will look for a match in shape, size, speed, duration and environment to decide on an alarm condition.

The result is a unique combination of high detection sensitivity with high false alarm immunity.

## Ease and flexibility of installation

---

1. Easy opening and closing system.
2. Easy access when changing the batteries.
3. Easy access to the mirror optics.
4. Tolerates wall angle deviation and different mounting heights.
5. Limited loss of coverage when objects are placed in the field of the PIR vision.
6. One mounting plate for all sensors in the series.

## Other members of the family

---

This family includes motion sensors with variants in detection ranges and a Pet Immune variant.

The consistent family aesthetics between the various models ensure a professional approach when installing different sensor types.



## Details

---

- Proven mirror optics inside to get a dense coverage pattern
- Selectable coverage pattern using mirror masks
- Full under crawl detection
- "5D" signal processing for false alarm immunity
- Auto focus with constant range sensitivity
- No adjustment required for different mounting heights
- Tolerates wall angle deviation
- End-user friendly product design for exchanging batteries
- 5-years battery life with 1 battery
- PetImmune functionality

# RF4012I4PI

Detector de movimiento vía radio (433 Mhz) PIR 9 cortinas de 12m con inmunidad mascotas.

## Technical specifications

### General

Tecnología	PIR
Antienmascaramiento	No
Inmune a mascotas	Si
Cámara	No
Tiempo de arranque del detector	1 min

### Detección

Alcance máximo de detección	12 m
Selección de rango de detección	6 m or 12 m
Cobertura (campo de visión)	86°
No. de cortinas	9
Rango de velocidad objetivo	0.3 m/s to 3.0 m/s

### Wired/wireless

Cableado - Inalámbrico	Wireless
Frecuencia inalámbrica	433 MHz legacy
Rango al aire libre	300 m

### Eléctrico


Consumo de corriente	22 $\mu$ A (avg.), 50 mA (max.)
Baterías	1 x CR123 (3.0 V, 1300 mAh lithium)
Vida útil de la batería	5 años

### Físico

Dimensiones físicas	130 x 69 x 53 mm (L x W x H)
Peso neto	146 g (incl. 1 battery)
Altura de montaje	2,3 to 3 m

### Medioambiental

Temperatura de funcionamiento	-10° to +55° C
Humedad relativa	95% max. non-condensing
Entorno	Interior
Clasificación IP	IP30 / IK02

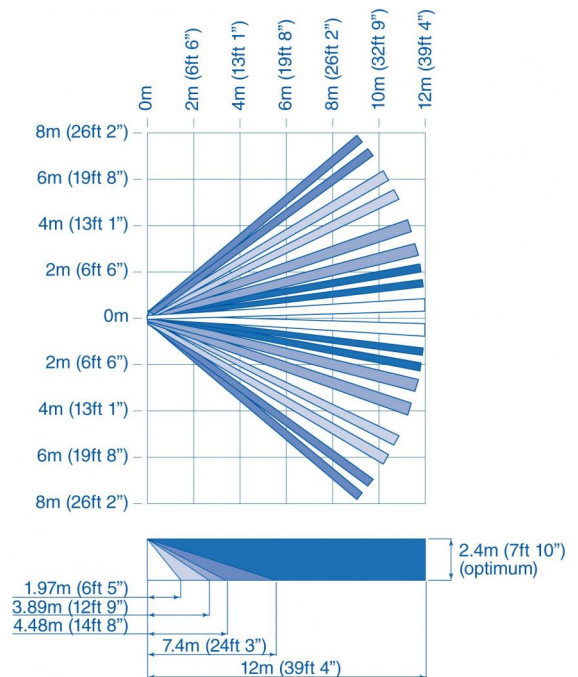

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

