ADAPTORS



WSFP

Die-cast aluminium reinforced support plate, suitable for WBJ, PTAC, WBM, WBOV mounts. It allows the internal cable to pass through a slot, and the threaded holes at the side, to connect to the WBOV bracket. Epoxypolyester powder painted.

PTCC

Pole mount adaptor for PTBC bracket. It allows the Pan & Tilt/bracket couple to be firmly attached to the pole. Epoxypolyester powder painted.

WCW

Corner adaptor for WBJ, PTAC, WBM, WBOV mounts. It allows the internal cable to pass through a slot, and the threaded holes at the side, to connect to the WBOV bracket. Epoxypolyester powder painted.


WCWGC

Corner adaptor for PTBC bracket. It allows the Pan & Tilt/bracket couple to be firmly attached to the corner. Made of stainless steel, the adapter is epoxypolyester powder painted.

WCP

Die-cast aluminium reinforcing support plate, suitable for WBJ, PTAC, WBM, WBOV mounts. It allows the internal cable to pass through a slot, and the threaded holes at the side, to connect to the WBOV bracket. Epoxypolyester powder painted.

- · Robust construction
- · Epoxy powder painted

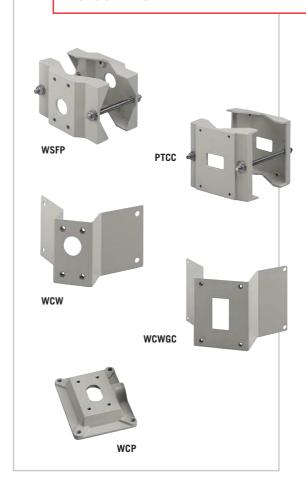


ADAPTORS AND BRACKETS CHART					
	WALL	CORNER		POLE	
	WCP	wcw	WCWGC	WSFP	PTCC
BRACKETS:					
WBJ	•	•		•	
WBM	•	•		•	
WBOV	•	•		•	
PTAC	•	•		•	
PTBC			•		•

Rev. 02.04 www.videotec.com







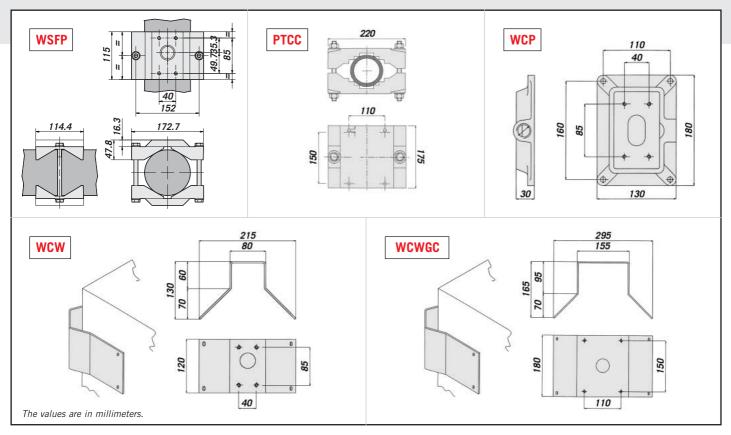

TECHNICAL DATA

GENERAL

WSFP

- Die-cast aluminium
- Epoxypolyester powder painted, colour RAL9002
- · Stainless steel screws

PTCC

- · Die-cast aluminium
- Epoxypolyester powder painted, colour RAL9002
- Stainless steel screws

WCW

- · Made of steel
- Epoxypolyester powder painted, colour RAL9002

WCWGC

- · Made of steel
- Epoxypolyester powder painted, colour RAL9002

WCP

- Die-cast aluminium
- Epoxypolyester powder painted, colour RAL9002

MECHANICAL

WSFP

- · Pole installation
- Load rating 30 kg (66.13 lb)
- Pole: Ø 65 110mm (2.55 4.33 in)

PTCC

- Pole installation
- Load rating 50 kg (11.22 lb)
- Pole: Ø 80 150 mm (3.14 5.9 in)

WCW

- · Corner installation
- Load rating 30 kg (66.13 lb)

WCWGC

- · Corner installation
- Load rating 50 kg (11.22 lb)

WCP

- Wall installation
- Load rating 50 kg (11.22 lb)

ENVIRONMENT

Indoor/outdoor



Unit Weight (kg / lb): WSFP: 1 / 2.2 **PTCC**: 2,6 / 5.7 **WCW**: 1 / 2.2 WCWGC: 2,2 / 4.85 **WCP**: 0,6 / 1.32

Package Weight (kg / lb): WSFP: 1 / 2.42 PTCC: 2,78 / 6.12 WCW: 1.1 / 2.42 WCWGC: 2,6 / 5.7

WCP: 0,7 / 1.54

Package Dimensions (cm / in): WSFP: /

PTCC: 14x25,5x20 / 5.51x10.03x7.87 WCW: 14.5x15x26.5 / 5.7x5.9x10.43 WCWGC: 23,5x31,5x24,5 / 9.25x12.4x9.64 WCP: 9,5x15,5x23 / 3.74x6.10x9.05

Master Carton (units):

WSFP: 30 **PTCC**: 15 **WCW**: 20 WCWGC: 6 **WCP**: 30

40

VIDEOTEC ITALY: E-mail: info@videotec.com

VIDEOTEC U.S.A.: E-mail: usasales@videotec.com



