


AUTOMATIC FIRE SUPPRESSION SYSTEM FOR SMALL ENCLOSURE

• Chemical extinguishing agent:

- FK-5-1-12

• System pressure at +20 °C: 18 bar

• Operating temperature range: -20 °C to +60 °C

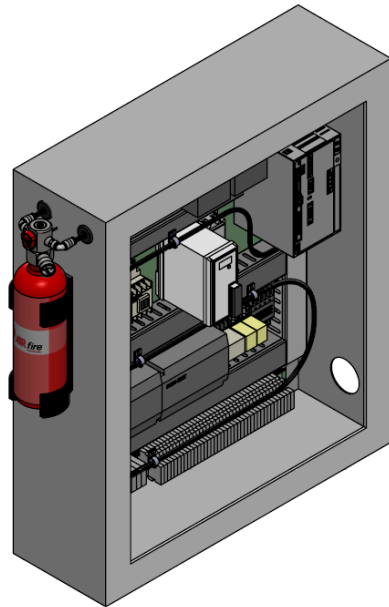


LPS1666: Issue 1.0.
Cert/LPCB ref. 1408c

LPCB Certified up to 2m³

System code for FK-5-1-12	Quantity of agent	Cylinder capacities
ARFFK501TB	1 Kg	1.3L
ARFFK502TB	2 Kg	3.8L
ARFFK503TB	3 Kg	
ARFFK504TB	4 Kg	7.5L
ARFFK506TB	6 Kg	

Approvals: LPCB approved direct low-pressure system (DLP) according to LPS1666 issue 1.0. LPCB Cert. ref. 1408c

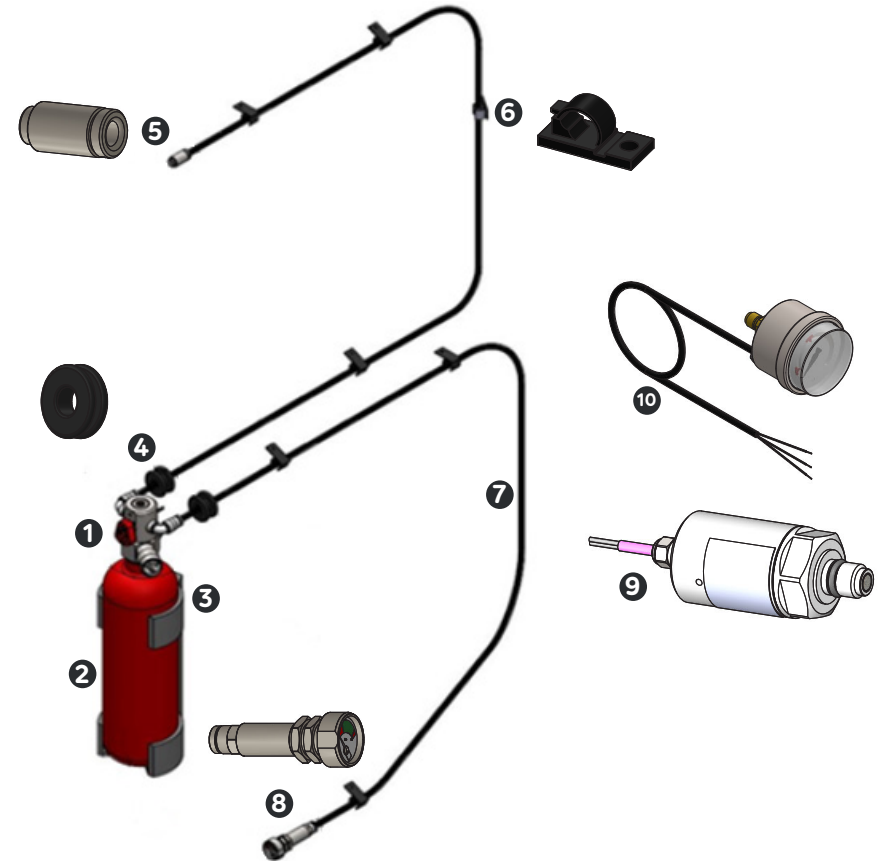

- ① Cylinder valve
- ② Cylinder
- ③ Cylinder bracket
- ④ Grommet
- ⑤ End of line plug
- ⑥ Tube attachment

- ⑦ Easydetect tube
- ⑧ End of line with pressure gauge

OPTIONAL COMPONENTS:

- ⑨ Signal transmitter
- ⑩ Pressure gauge with double contact