

ZP7-RB1-P

Base de conexión empotrada Ziton para la serie de detectores ZP7. Blanco polar.

General

The ZP7-RB1-P detector base is a standard, POLAR WHITE, recess mounted fire detector base for ZP7 series addressable detectors. It allows these detectors to be semi-recessed into ceiling tiles when installed into buildings with suspended ceilings. The detector's low profile is further reduced without any increased difficulty in wiring termination.

Semi recessed fixing

For ease of installation, the base moulding passes through a clearance hole in the ceiling tile where it is clamped between a retaining flange on the underside of the base moulding and a threaded collar tightened down from above. Tile sections of up to 25 mm can be accommodated.

Common to all the detectors in the ZP7 range, the ZP7-RB1-P allows removal and replacement of detectors without disconnection of wiring from terminals. Detectors plug into the base with a simple twist and lock action, allowing quick and easy removal for cleaning and servicing, or reselection of device type should the usage of the protected area change.

Robust wiring terminals

All ZP7 bases feature robust wiring terminals with captive clamping washers to ensure secure wiring termination. Terminals are provided inside the moulding for loop connections and the termination of cable screening. Provision is also made for the connection of a remote LED when required.

Automatic locking option and labelling

In order to prevent unauthorised removal of a detector from its base, an automatic locking breakout is incorporated into all ZP/ base mouldings. If the breakout is removed, detectors can only be released from their bases by use of a special removal tool. The locking facility is an easily applied option often implemented at the system commissioning stage.

Matching spaces for address labels are provided on detector and base mouldings, ensuring that when removed, detectors are replaced in the correct location. The address number facility also enables detectors to be easily identified when viewed from floor level.



Detalles

- Enhances detector low profile
- Common to all ZP7 series detectors
- Automatic locking option
- Address identification label
- Ease of installation

ZP7-RB1-P

Base de conexión empotrada Ziton para la serie de detectores ZP7. Blanco polar.

Technical specifications

General

Compatibilidad	ZP7 Series systems
Conectividad	2 core loop or spur

Electrical

Voltaje de funcionamiento	16 to 22 VDC
Voltaje de comunicación	20 V
No. de núcleos de cable	2
Terminales	5 (Loop +ve in/out, Loop -ve in/out, Cable screen continuity, Remote LED +ve, Remote LED -ve)

Physical


Dimensiones físicas	138 x 38 mm (Ø x H)
Peso neto	110 g
Color	Blanco polar
Tipo de Montaje	Caja trasera, Montaje en el techo, Montaje empotrado
Entradas de cable	1
Material	ABS moldeado

Environmental

Antivandálico	No
Temperatura de funcionamiento	-10 to 75°C
Humedad relativa	0 to 95% non-condensing
Environment	Interior
Clasificación IP	IP42 (EN60529)
Altitude	0 to 6000 m

Regulatory

Cumplimiento	CE, REACH, RoHS 2, WEEE
Certificación	CPR
Normativas	EN54 (with detector)
Environmental	EEC89/336

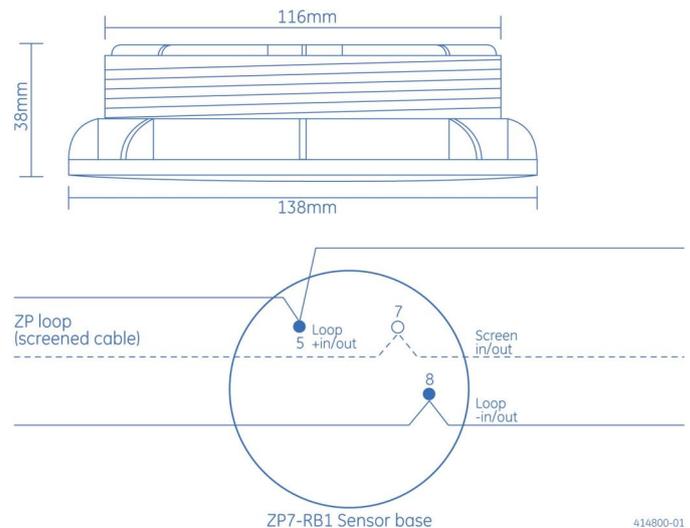

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 29 August 2023 - 15:57