




2010-2A-ZI-40

Addressable fire panel component, LED indicator, 40 zones

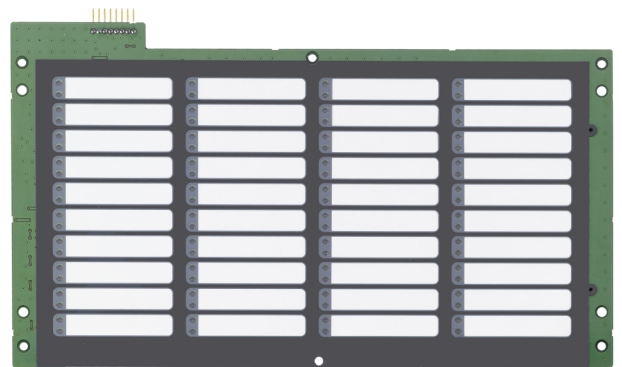

Details

- 40 zones
- 1 fire and 1 fault LED per zone
- Ample space for text
- Addressable fire panel component, LED indicator, 40 zone
- Suitable for big panel 2X-A and ZP2-A series

2010-2A-ZI-40

Addressable fire panel component, LED indicator, 40 zones

Technical specifications

Zone

Maximum zone capacity up to 40

Physical

Form factor	Large
Physical dimensions	191 x 60 x 325 mm (W x H x D)
Net weight	180 g
Shipping weight	320 g
Mounting type	In cabinet

Regulatory

Compliance	CPD, RoHS, WEEE
Certification	EN54-2, EN54-4



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 23 January 2023 - 16:24